


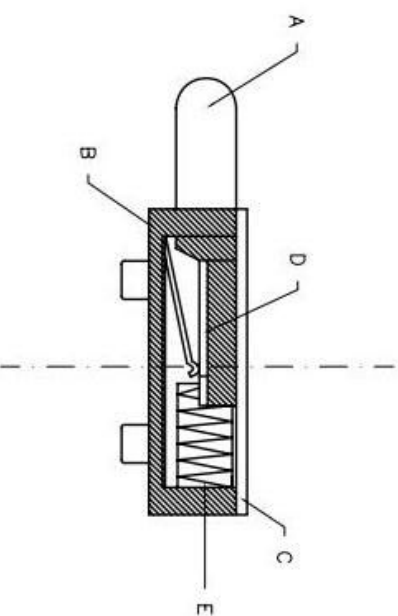
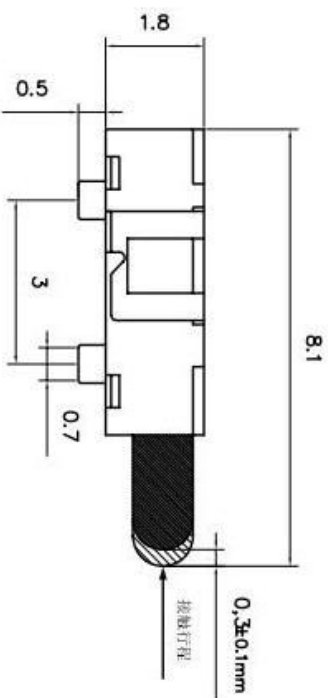
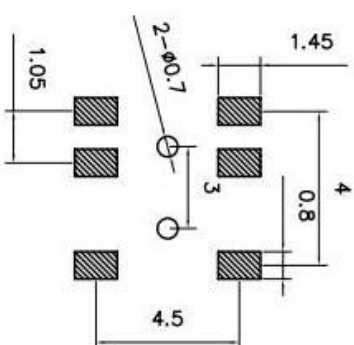


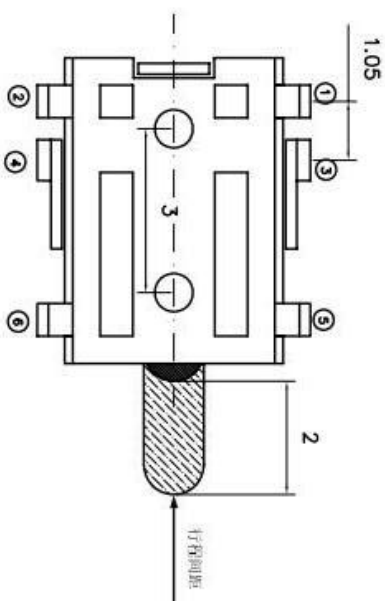

SPECIFICATIONS	
Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

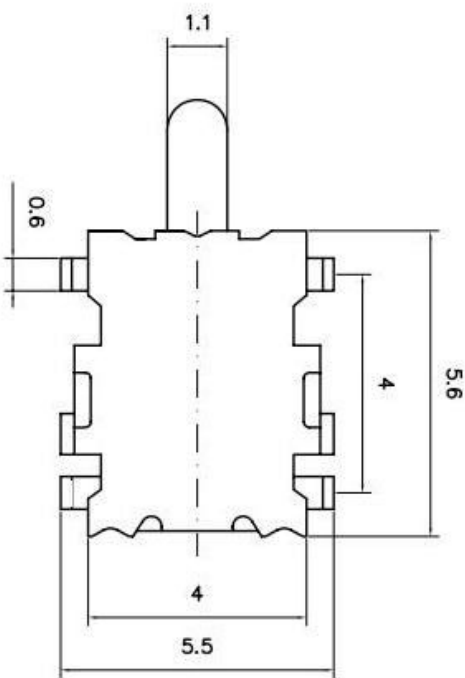

CIRCUIT DIAGRAM



东莞市高迪电子有限公司
Dong Guan KDRC Electronic Switch Jack Co., Ltd.

E	TERMINAL	PHOSPHOR BRONZE	4	A ₂ PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	A ₂ PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

PARTS	MATERIALS	QTY	FINISH
-------	-----------	-----	--------

DRAWN BY:	DATE	MATL	TITLE	SWITCH
1. 1. 1.	05/20/05			

ENGLISH	
DATE	05/21/15
CHIEFED BY:	Jack Liu
DETECTOR ON/OFF	

DATE	FINISH	MODULE	DEFLECTION SWITCH	ENTER
05/21/15				

APPROVED BY:	DATE	SCALE	1:1	DWG NO.	SHEET
JACKY CHOI	03/21/15				A4

DATE OF ORDER	05/21/15	SHEET NO	1 of 1	PART NO		VER
TYPE OF ORDER						VER
TRANS K 30						

G		H		I	
ENTRY NAME	UNIT (LIT.)	ORIGINATOR	DATE	REMARKS	RZ

[illegible]