
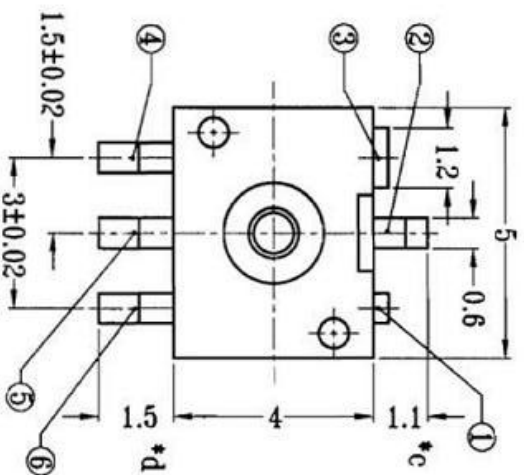
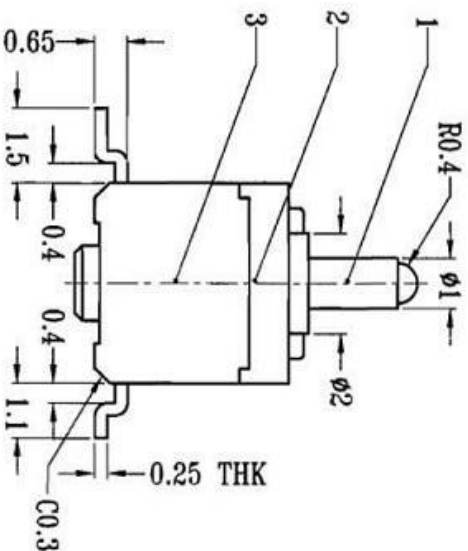


CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

NO.	PARTS	DATE	MAT'L	QTY	FINISH
E	TERMINAL		PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING		PHOSPHOR BRONZE	1	Ag PLATED
C	COVER		PA46	1	BLACK
B	CASE		PPA	1	BLACK
A	KNOB		PA46	1	BLACK

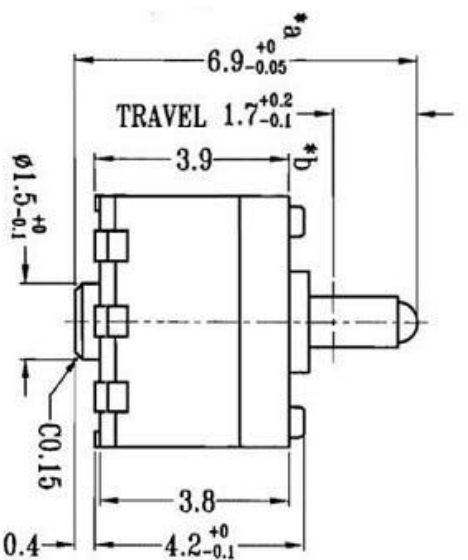

东莞市高迪电子有限公司
Dong Guan KIDR Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:	3RD. ANGLES	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SIZE
1	塑料外壳及模块	Jack	05/11/5	Up to 5 - 15 ±0.3 Above 15 - 30 ±0.4 Above 30 - 50 ±0.5	3RD. ANGLES	MM		Jacky Chen	05/21/15	SCALE	1:1	DWG NO.	A4
2	塑料外壳及模块	Jack	05/11/5					Tony Kao	05/21/15			PART NO.	R2