
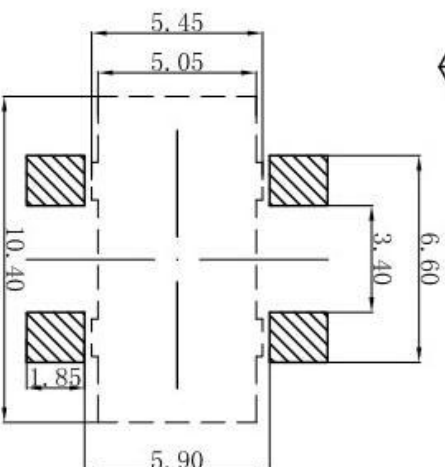
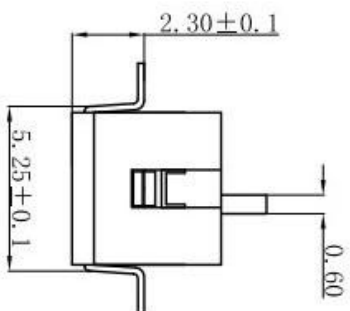
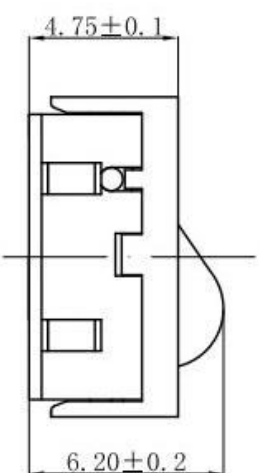
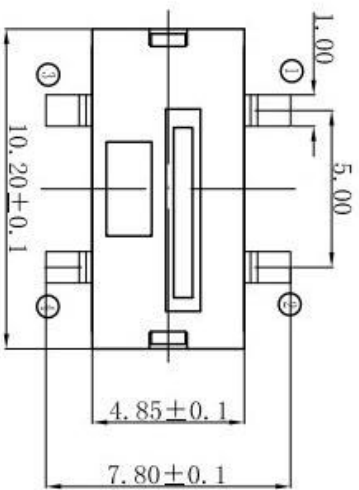





PCB 焊接尺寸图


SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

CIRCUIT DIAGRAM



电气原理图

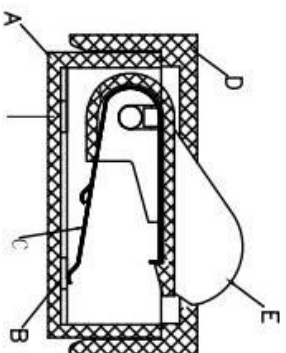

NO.	PARTS	MATERIALS	QTY	FINISH
E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK



东莞市高迪电子有限公司
Dongguan BDR Electronic Switch Jack Co., Ltd.

1	规格书及物料表MODULE	Jack	05/11/15	TOLERANCE UNLESS OTHERWISE STATED: Above 5 - 15 ±0.3 Above 15 - 30 ±0.4 Above 30 - 50 ±0.5	3RD ANGEL'S	UNITS	MM	APPROVED BY: Tony Kao	DATE 05/21/15	SHEET NO.	1 of 1	PART NO.	SIZE A4 VER R2
2	规格书及物料表MODULE	Jack	05/11/15					CHECKED BY: Jacky Chen	DATE 05/21/15	SCALE	1:1	DWG NO.	
7	规格书及物料表MODULE	Jack	05/11/15					DRAWN BY: Jacky Chen	DATE 05/21/15	FINISH		MODLE	DETECTOR SWITCH