
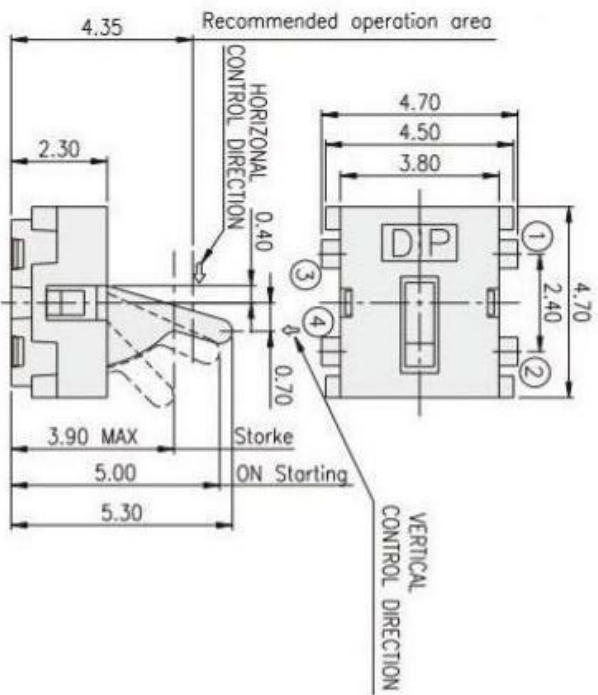


WITH COVER FOR AUTO-DIPPING

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ± 15gf
Life	50,000 cycles

E	THERMINAL.	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH



P.C.B. LAYOUT



东莞市高迪电子有限公司
Dongguan HDR Electronic Switch Jack Co., Ltd.

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

[illegible]