

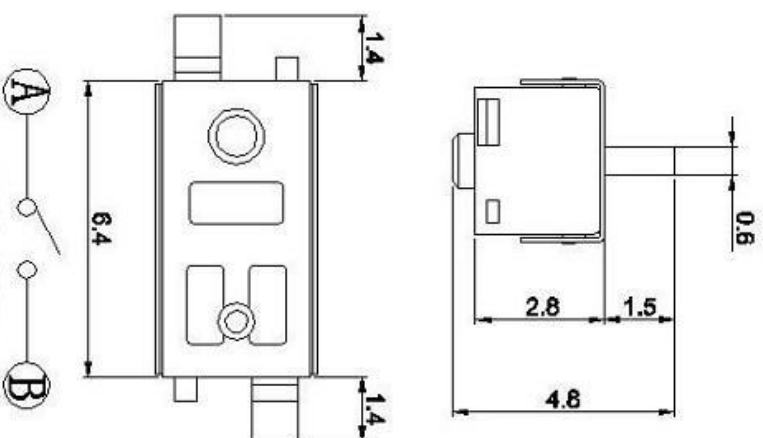
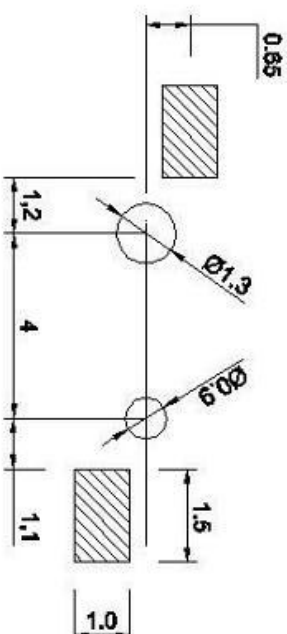


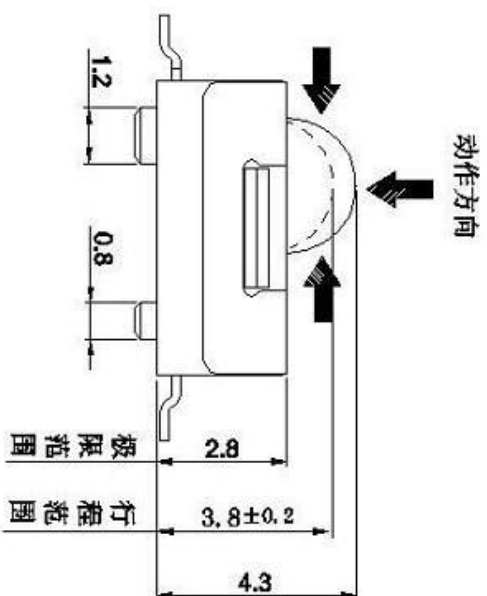

安装尺寸图

SPECIFICATIONS	
Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

E	THERMINAL.	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH



东莞市高迪电子有限公司
Dong Guan KUDR Electronic Switch Jack Co., Ltd.

						DRAWN BY:	DATE	MATL.	TITLE	SWITCH	
						Jack Lu	05/21/15	FINISH	MODULE	DETECTOR SWITCH	
						CHECKED BY:	DATE				
						Jacky Chen	05/21/15	SCALE	DWG NO.		SIZ
						APPROVED BY:	DATE				A4
						Tony Kao	05/21/15	SHEET NO.	PART NO.		VEN R2
								1 of 1			