

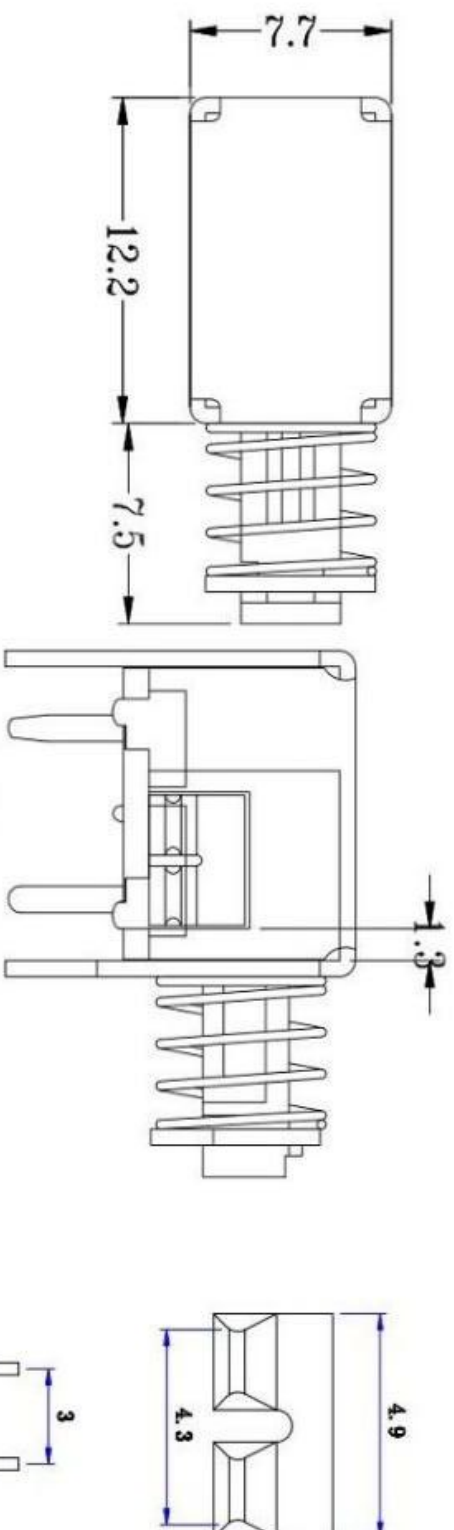




Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

E	THERMINAL.	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

[illegible]

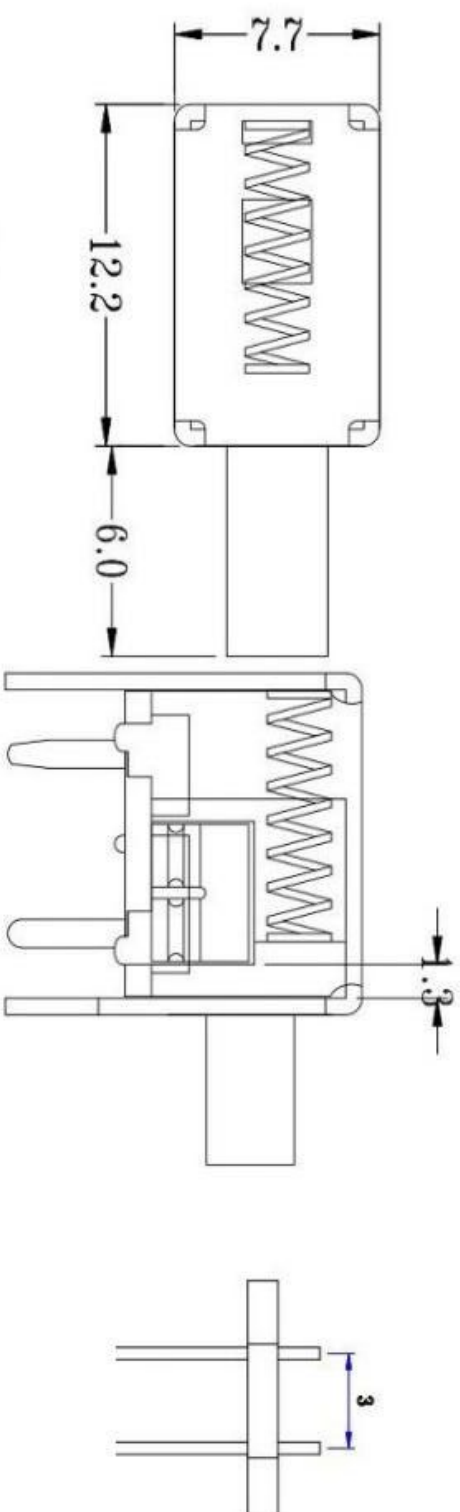

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH



东莞市高迪电子有限公司
Dong Guan KDSR Electronic Switch Jack Co., Ltd.

2	塑料固定座及MODULE	Jack	05/11/5	3RD. ANGEL'S	UNITS	MM	Jack Lu	05/21/15	MATL.	TITLE	SWITCH	SIZE
1	塑料固定座及MODULE	Jack	05/11/5	3RD. ANGEL'S	UNITS	MM	Jacky Chen	05/21/15	FINISH	MODLE	DETECTOR SWITCH	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE	3RD. ANGEL'S	UNITS	MM	APPROVED BY:	DATE	SCALE	DWG NO.	PART NO.	VER
							Tony Kao	05/21/15	SHEET NO.	1 of 1		R2

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 - ±0.2
Above 5 - ±0.3
Above 15 - 30 ±0.4
Above 30 - 50 ±0.5
Angle