
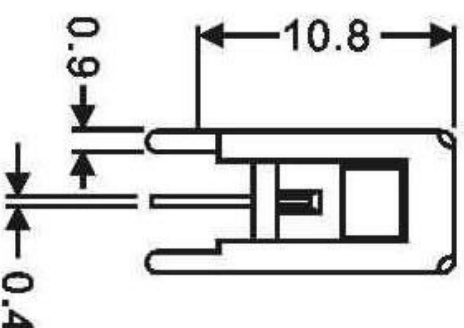
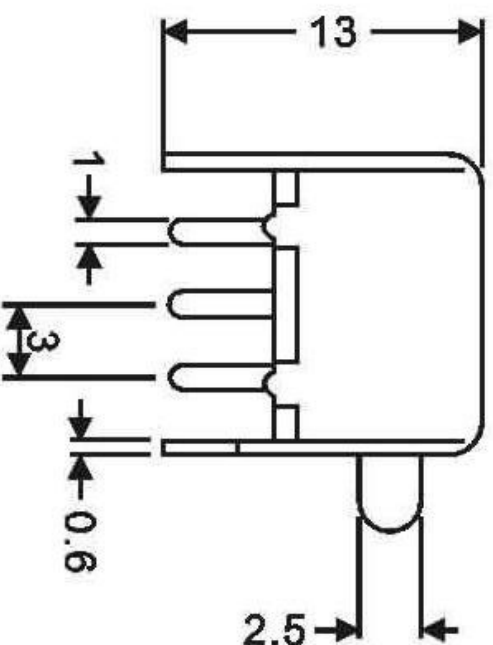
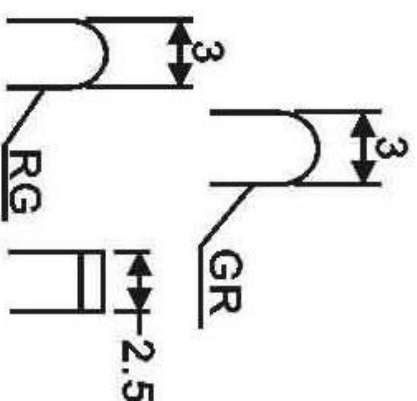


CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

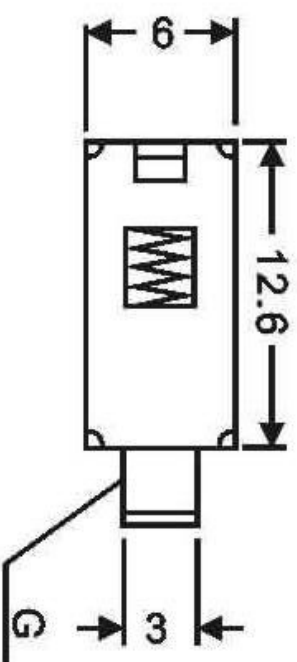

东莞市高迪电子有限公司
Dongguan KDR Electronic Switch Jack Co., Ltd.

2	规格/规格书/规格书	Jack	05/11/15	3RD	ANGEL'S	UNITS	MM	CHECKED BY:	Jacky Chen	DATE	05/21/15	SCALE	1:1	DWG NO.	PART NO.	SIZE
1	规格/规格书/规格书	Jack	05/11/15	3RD	ANGEL'S	UNITS	MM	APPROVED BY:	Tony Kao	DATE	05/21/15	SHEET NO.	1 of 1	PART NO.	PART NO.	VER
ITEM NO.	DESCRIPTION	DRAWN	DATE	UP TO 5	ANGEL'S	UNITS	MM	APPROVED BY:	Tony Kao	DATE	05/21/15	SHEET NO.	1 of 1	PART NO.	PART NO.	VER