

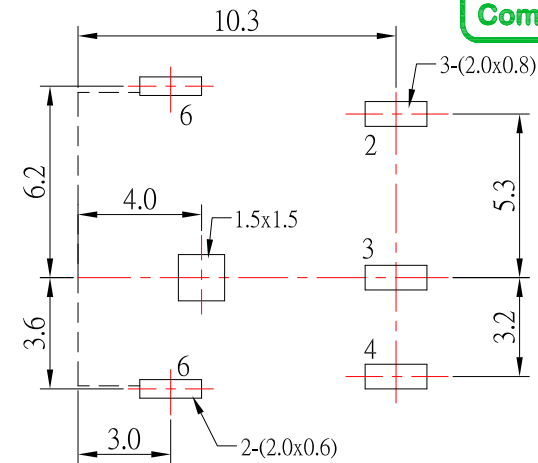
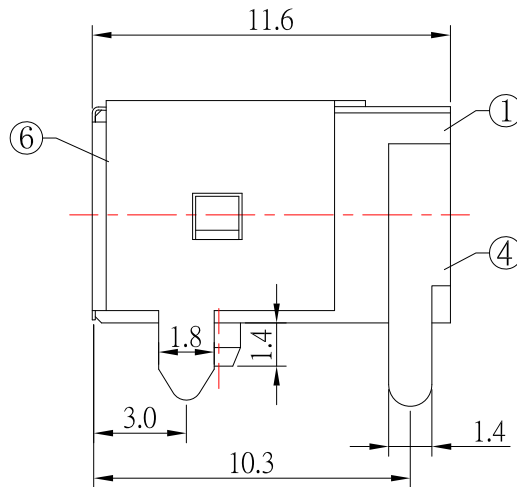
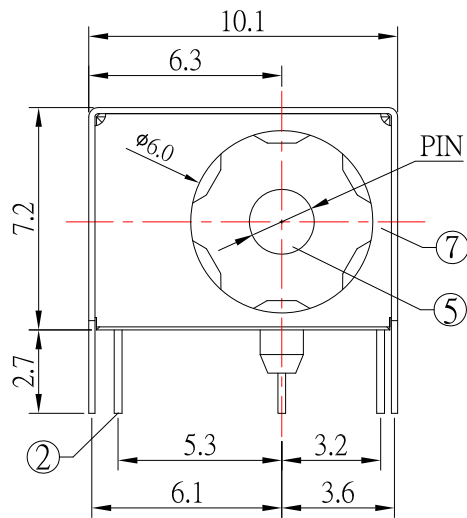





P.C.B LAYOUT
TOP VIEW

MODEL NO.	DC-048S5-x
SCHEMATIC	4(5) 3 2
CENTER PIN	ϕ 1.65mm ϕ 2.0mm ϕ 2.5mm

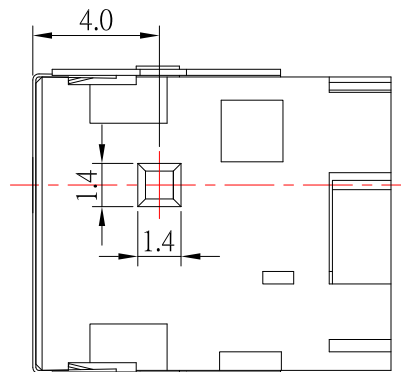

SPECIFICATION

- 1.Rating : DC 30V 2.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

⑦	COVER	1	SUS	Ni-Plating
⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
⑤	PIN	1	BRASS	Ni-Plating
④	CONTACT FOOT	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING PIECE	1	SUS	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/03/18	FINISH	MODLE	DC JACK 帶彈片
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	05/03/18	1 : 1	DC-048S5-x-S124	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	05/03/18	1 of 1	DC-048S5-x-S124	R



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM