

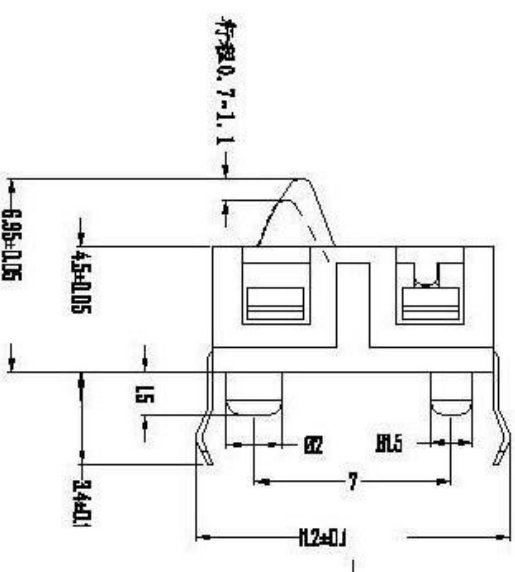


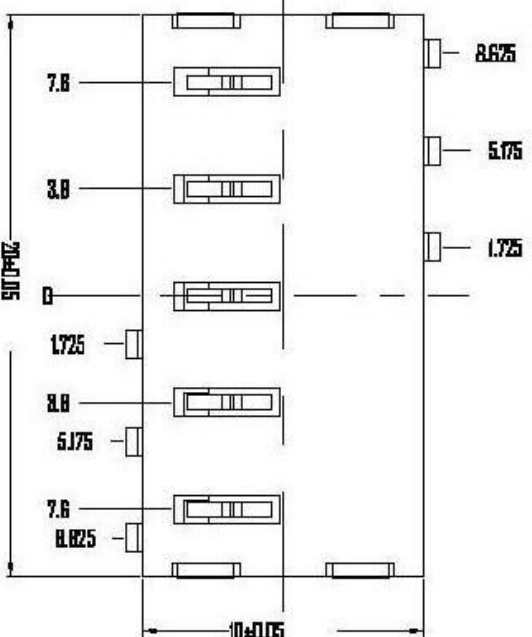

SPECIFICATIONS	
Rating	DC 12V 50mA
Contact Resistance	150m Ω Max
Insulation Resistance	50M Ω Min
Operating Force	40 $\pm$ 15gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

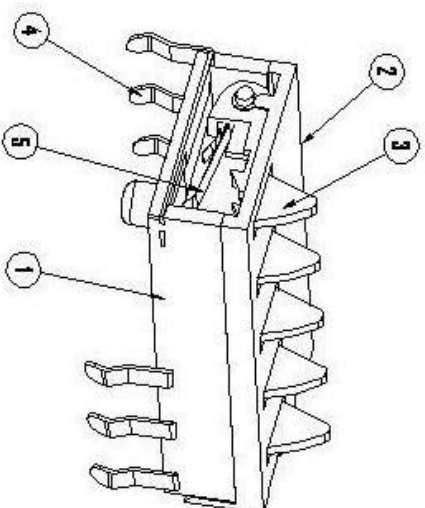

东莞市高迪电子有限公司
Dong Guan HDRR Electronic Switch Jack Co., Ltd.

[illegible]

SPECIFICATIONS