

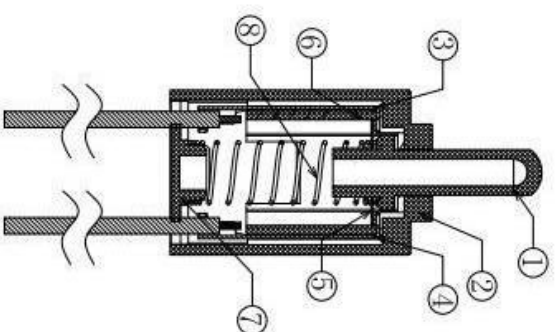




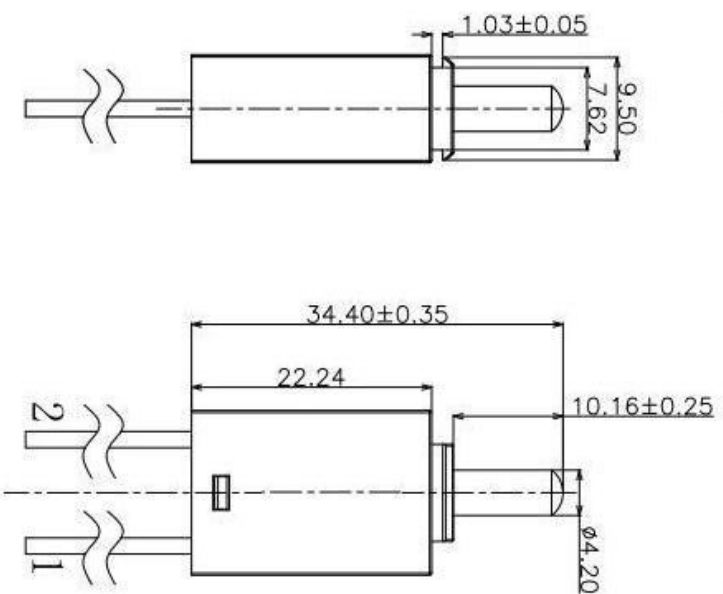

CIRCUIT DIAGRAM

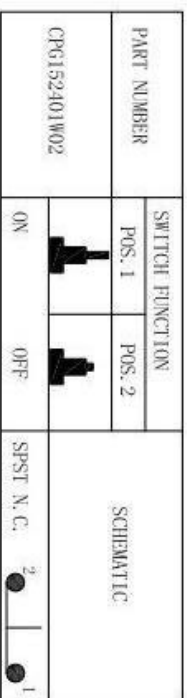

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
PARTS		MATERIALS	QTY	FINISH



东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

2	塑料面板及模块	Jack	0511/5	Up to 5 - 15 ±0.2	3RD	ANGEL'S	UNITS	MM
1	塑料面板及模块	Jack	0611/5	Above 15 - 30 ±0.4				
				Above 30 - 50 ±0.5				

DRAWN BY: Jack Lu		DATE: 05/21/15		MAT'L.		TITLE		SWITCH			
CHECKED BY: Jacky Chen		DATE: 05/21/15		FINISH		MODULE		DETECTOR SWITCH			
APPROVED BY: Tony Kao		DATE: 05/21/15		SCALE		1 : 1		DWG NO.			
				SHEET NO.		1 of 1		PART NO.			
								SIZE		A4	
								VER		R2	