
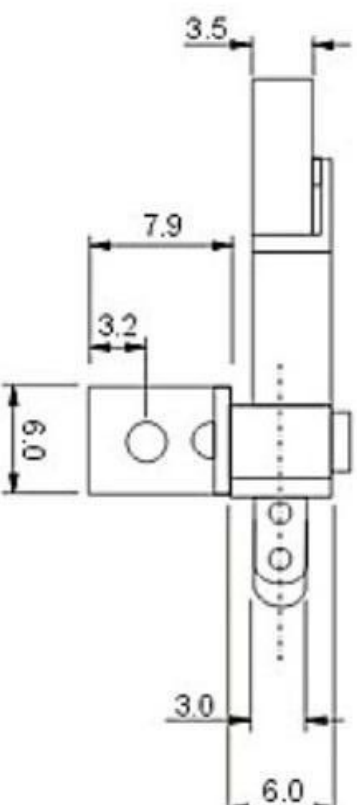


CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

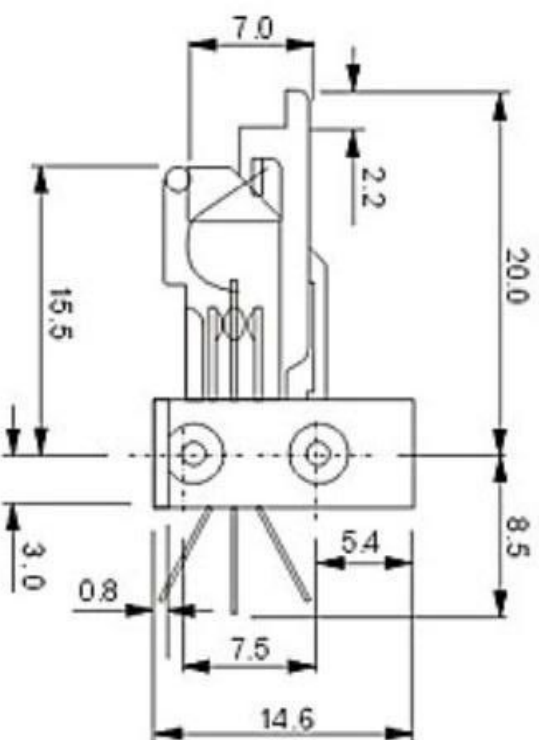

东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

1	零件图及模块图	Jack	05/11/15	TOLERANCE UNLESS OTHERWISE STATED: Above 5 - 15 ±0.3 Above 15 - 30 ±0.4 Above 30 - 50 ±0.5	3RD ANGEL'S	UNITS	MM	APPROVED BY: Tony Kao	DATE 05/21/15	SHEET NO. 1 of 1	PART NO.	SIZE A4 VER R2
2	零件图及模块图	Jack	05/11/15					CHECKED BY: Jacky Chen	DATE 05/21/15	SCALE 1:1	DWG NO.	
7								DRAWN BY: Jack Lu	DATE 05/21/15	MAT'L FINISH	TITLE MODLE	SWITCH DETECTOR SWITCH