

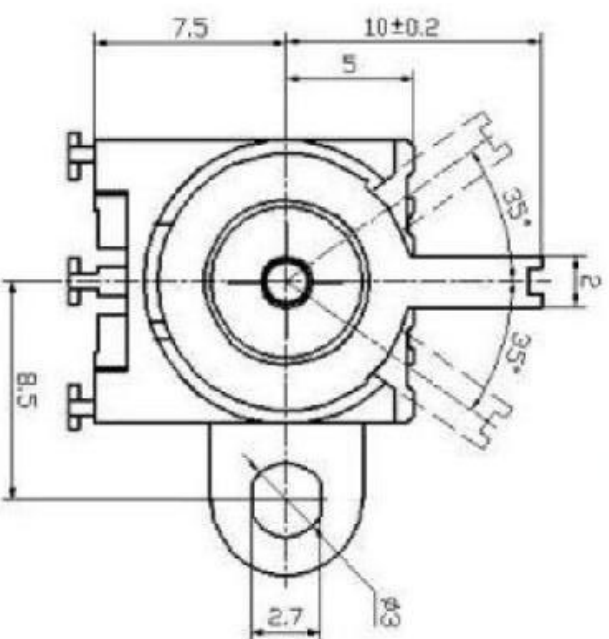


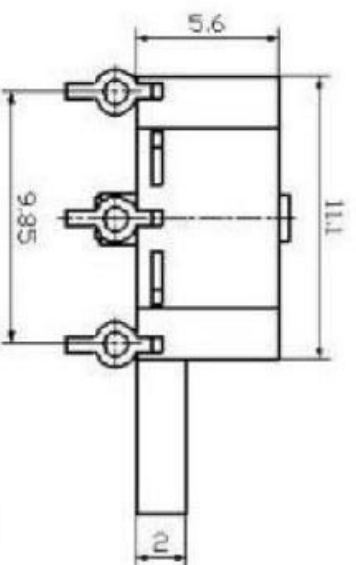

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ± 15gf
Life	50,000 cycles



东莞市高迪电子有限公司
Dong Guan HDRR Electronic Switch Jack Co., Ltd.

E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

NO.	PARTS	MATERIALS	QTY	FINISH
-----	-------	-----------	-----	--------

DRAWN BY:	DATE	REVIEW	DATE

Back 111	05/21/15	MAIL		LIFE	SWITCH
----------	----------	------	--	------	--------

DIRECTED BY: _____ DATE: _____	FINISH	MODEL	DETECTOR SWITCH
-----------------------------------	--------	-------	-----------------

CHARGED BY:	DATE	FINISH	MODLE	DEFECTOR SWITCH

MIM	Jacky Chen	05/21/15	SCALE	1 : 1	DWG NO.	PART NO.	SIZE
	APPROVED BY:	DATE					A4
	Tony Kao	05/21/15	SHEET NO.	1 of 1			VER R2