



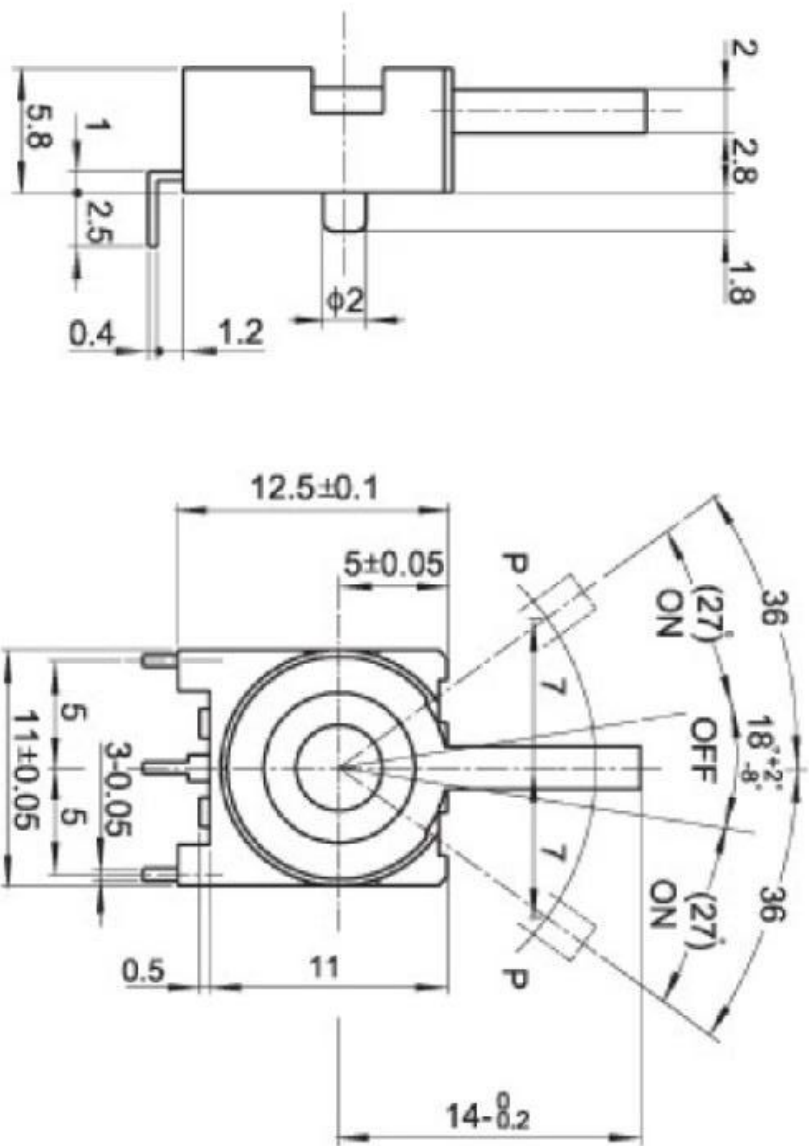

CIRCUIT DIAGRAM



SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK

NO.	PARTS	MATERIALS	QTY	FINISH
-----	-------	-----------	-----	--------



东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

2	规格书/规格书/规格书	Jack	05/11/15	3RD	ANGELS	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SIZE
1	规格书/规格书/规格书	Jack	05/11/15	3RD	ANGELS	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SIZE
1	规格书/规格书/规格书	Jack	05/11/15	3RD	ANGELS	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SIZE
1	规格书/规格书/规格书	Jack	05/11/15	3RD	ANGELS	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SIZE