

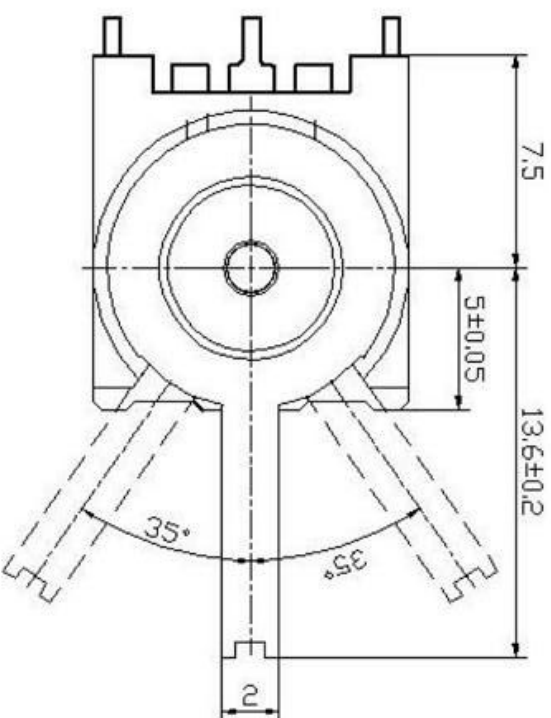
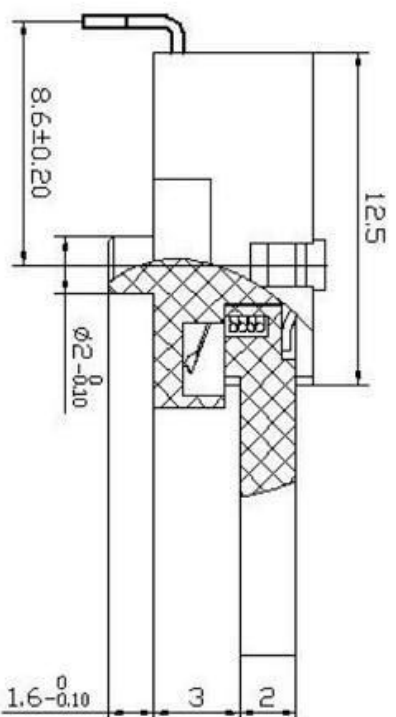


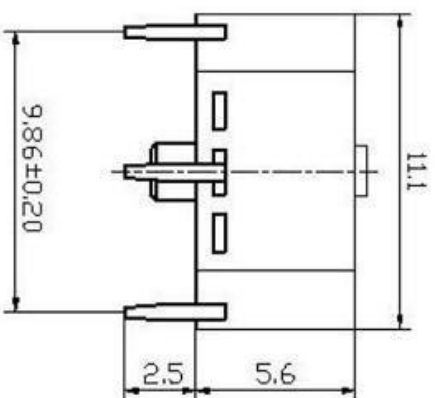

| SPECIFICATIONS        |               |
|-----------------------|---------------|
| Rating                | DC 12V 50mA   |
| Contact Resistance    | 150mΩ Max     |
| Insulation Resistance | 50MΩ Min      |
| Operating Force       | 40 ±15gf      |
| Life                  | 50,000 cycles |



### CIRCUIT DIAGRAM

|     |                |                 |     |           |
|-----|----------------|-----------------|-----|-----------|
| E   | TERMINAL       | PHOSPHOR BRONZE | 4   | Ag PLATED |
| D   | CONTACT SPRING | PHOSPHOR BRONZE | 1   | Ag PLATED |
| C   | COVER          | PA46            | 1   | BLACK     |
| B   | CASE           | PPA             | 1   | BLACK     |
| A   | KNOB           | PA46            | 1   | BLACK     |
| NO. | PARTS          | MATERIALS       | QTY | FINISH    |



东莞市高迪电子有限公司  
Dongguan HDRR Electronic Switch Jack Co., Ltd.

[illegible]

### SPECIFICATIONS