

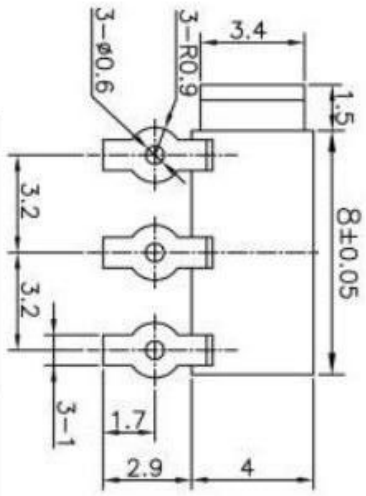
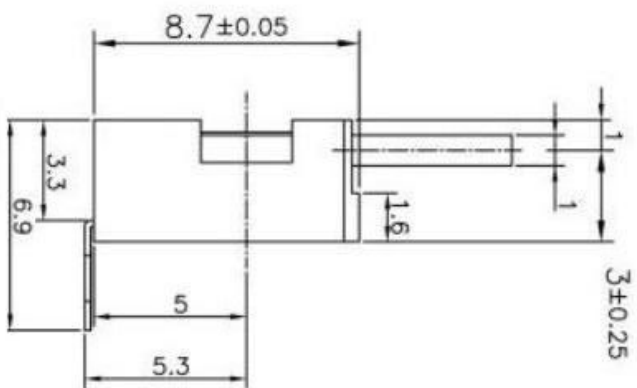


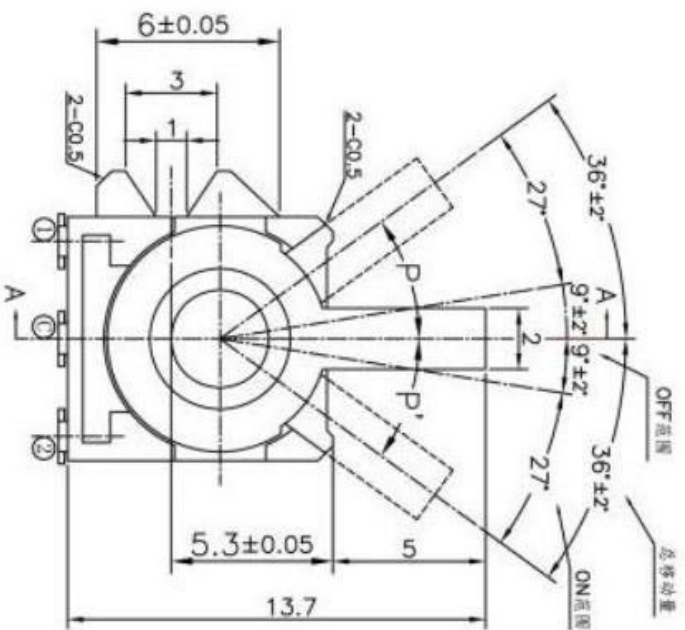

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

NO.	PARTS	DATE	MAT'L	TITLE	QTY	FINISH
E	TERMINAL			PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING			PHOSPHOR BRONZE	1	Ag PLATED
C	COVER			PA46	1	BLACK
B	CASE			PPA	1	BLACK
A	KNOB			PA46	1	BLACK



CIRCUIT DIAGRAM



东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:	UP TO 5°	5° ~ 15°	15° ~ 30°	30° ~ 50°	3RD. ANGLES	UNITS	MM	DRAWN BY:	CHECKED BY:	DATE	DATE	SCALE	DWG NO.	PART NO.	SIZE
1	新制高阻型开关 10A/60m	Jack	06/11/5	±0.3	±0.3	±0.4	±0.5	±0.5	3RD. ANGLES	MM		Jack Liu	05/21/15	05/21/15	1:1				A4
2	更新高阻型开关 10A/60m	Jack	06/11/5	±0.3	±0.3	±0.4	±0.5	±0.5	3RD. ANGLES	MM		Jacky Chen	05/21/15	05/21/15	1:1				R2
7												APPROVED BY:	DATE	DATE					
												Tony Kao	05/21/15	05/21/15					

