
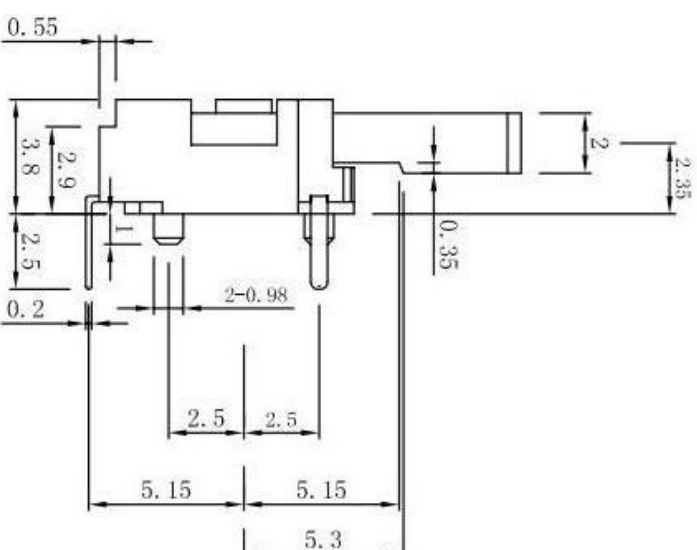


SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

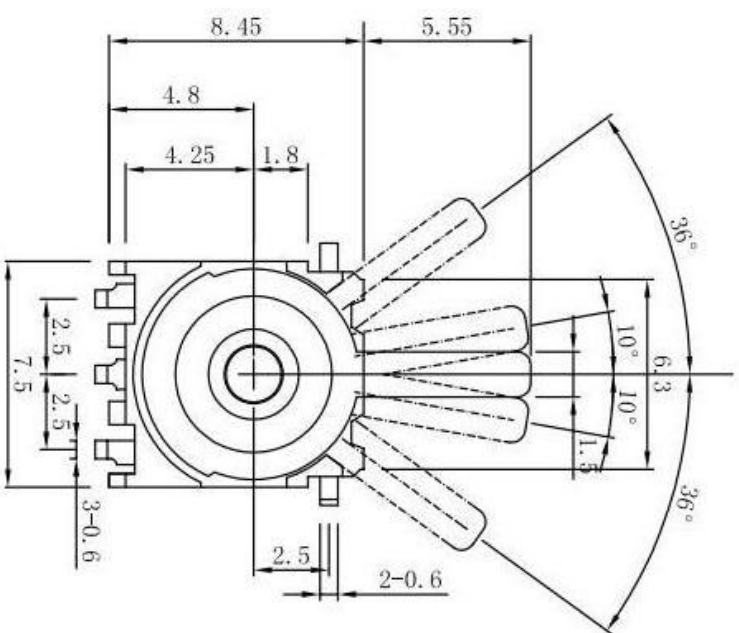

东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

2	塑料外壳及模块	Jack	05/11/5	3RD. ANGEL'S	UNITS	MM	APPROVED BY: Tony Kao	DATE: 05/21/15	SHEET NO.	1 of 1	PART NO.	SIZE
1	塑料外壳及模块 K-1030mm	Jack	06/11/5				CHECKED BY: Jacky Chen	DATE: 05/21/15	SCALE	1:1	DWG NO.	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE				APPROVED BY: Tony Kao	DATE: 05/21/15	SHEET NO.	1 of 1	PART NO.	R2

TOLERANCE UNLESS
OTHERWISE STATED: Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3