
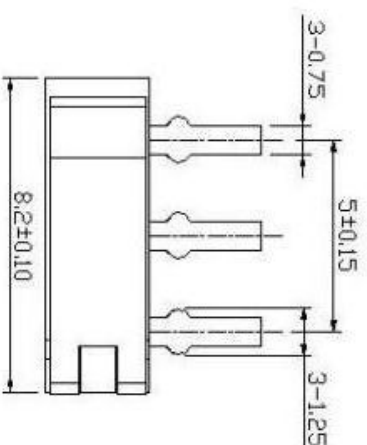
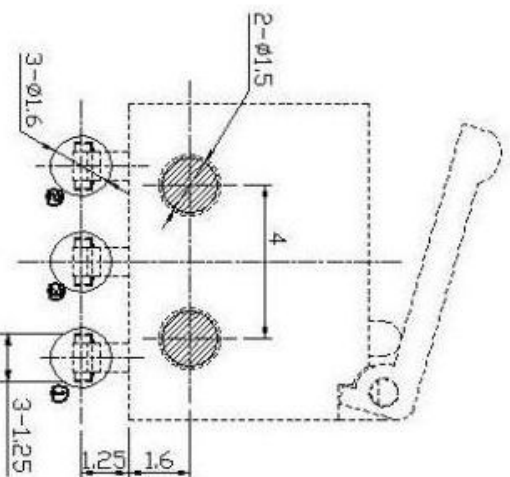
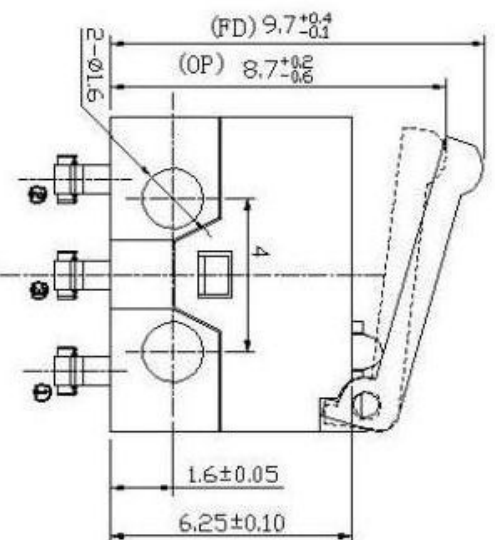


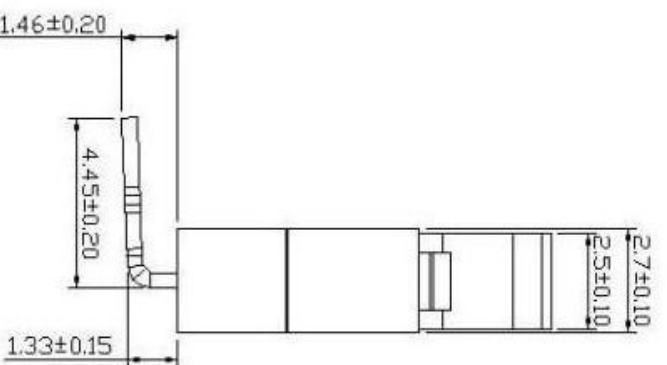

PCB

Specifications

Specifications			Material		
1	Rating	30 VDC / 500mA	1	Terminal	Brass , Silver Plated
2	Operating Force	50 gf Max	2	Body	PBT
3	Life	300,000 cycles Min	3	Cover	POM
4	Operating Position	6.7mm ± 0.5mm	4	Level	POM
5	Contact Resistance	100 m ohms Max(Initial)	5	Pin	POM
6	Insulation Resistance	100 M ohms Min(at 250VDC)	6	Contact	Phosphor Bronze , Silver Plated
7	Dielectric withstanding voltage	500V/AC 1 minute			
8	Operating temperature	-25 C ~ +70 C			
9	Ambient humidity	35% ~ 85% RH			
10	Malfunction durability	10 to 55 Hz 1.5mm double amplitude during 2 hours			

Material

DRAWN BY:	DATE	MATL.	TITLE	SWITCH	
Jack Lu	12/16/15				
CHECKED BY:	DATE	FINISH	MODLE	MICRO SWITCH	
Jacky Chen	12/16/15				
APPROVED BY:	DATE	SCALE	DWG NO.		
Tony Kao	12/16/15				
		SHEET NO.	1 of 1	PART NO.	



东莞市高迪电子有限公司

Dongguan KDR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

UP TO 3 - 15
Above 15 - 30
Above 30 - 50
Above 50 - 100

±0.2
±0.1
±0.1
±0.1

ANGEL'S

3RD

UNITS

MM

DATE