






DIMENSIONS

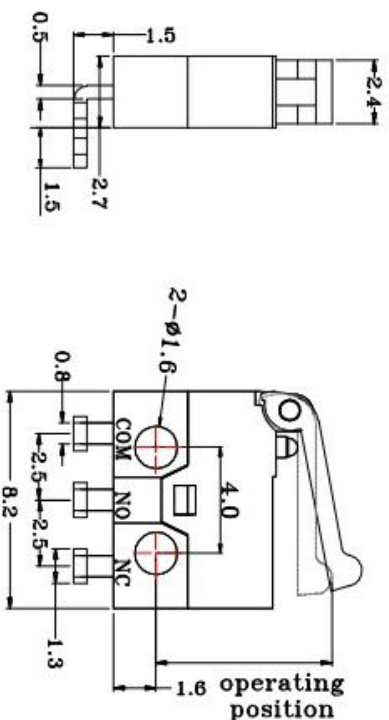

CIRCUIT



P.C.B LAYOUT MOUNTING PATTERN

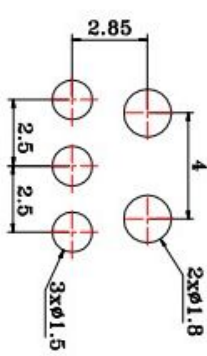

Specifications

1	Rating	30 VDC / 500mA
2	Operating Force	50 gf Max
3	Life	300,000 cycles Min
4	Operating Position	6.7mm ± 0.5mm
5	Contact Resistance	100 m ohms Max(Initial)
6	Insulation Resistance	100 M ohms Min(at 250VDC)
7	Dielectric withstanding voltage	500VAC 1 minute
8	Operating temperature	-25°C ~ +70°C
9	Ambient humidity	35% ~ 85% RH
10	Malfunction durability	10 to 55 Hz 1.5mm double amplitude during 2 hours

Material

1	Terminal	Brass, Silver Plated
2	Body	PBT
3	Cover	POM
4	Level	POM
5	Pin	POM
6	Contact	Phosphor Bronze, Silver Plated



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

DRAWN BY: Jack Lu		DATE	12/16/15	MATL.		TITLE	SWITCH
CHECKED BY: Jacky Chen		DATE	12/16/15	FINISH		MODULE	MICRO SWITCH
APPROVED BY: Tony Kao		DATE	12/16/15	SCALE	1 : 1	DWG NO.	SSM-001R
				SHEET NO.	1 of 1	PART NO.	SSM-001R
							SIZE A4
							VER R1