



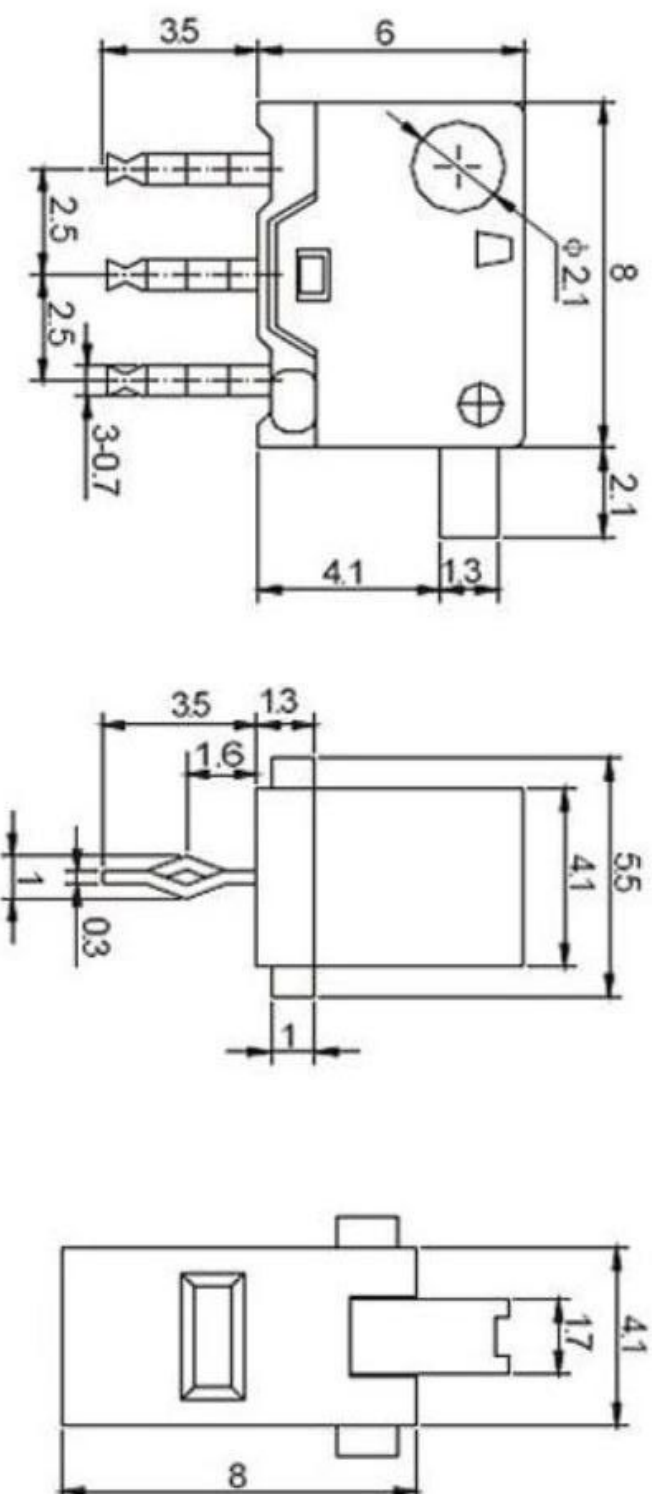

P.C.B开孔图

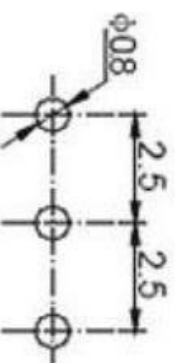

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

电原理图



CIRCUIT DIAGRAM

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	Knob	PA46	1	BLACK

NO.	PARTS	MATERIALS	QTY	FINISH
-----	-------	-----------	-----	--------



东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

1	规格书及模块图	Jack	05/11/5	TOLERANCE UNLESS OTHERWISE STATED: Above 5 - 15 ±0.3 Above 15 - 30 ±0.4 Above 30 - 50 ±0.5	3RD ANGELS	UNIT	MM	APPROVED BY: Tony Kao	DATE 05/21/15	SHEET NO. 1 of 1	PART NO.	SIZE A4 VER R2
2	规格书及模块图	Jack	05/11/5					CHECKED BY: Jacky Chen	DATE 05/21/15	SCALE 1:1	DWG NO.	
7	规格书及模块图	Jack	05/11/5					DRAWN BY: Jack Lu	DATE 05/21/15	MATL FINISH	TITLE MODLE	SWITCH DETECTOR SWITCH