





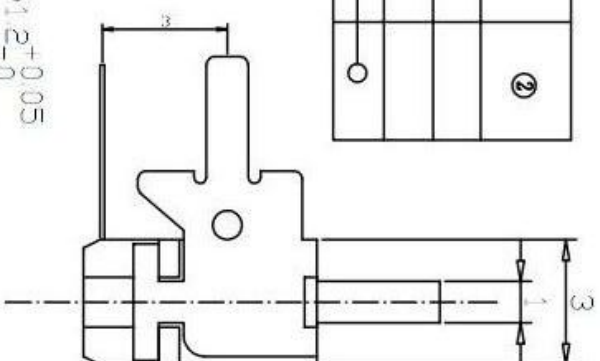

terminal No.	①	③	②
Lever position		○	○
⑦		○	
⑧		○	
④		○	

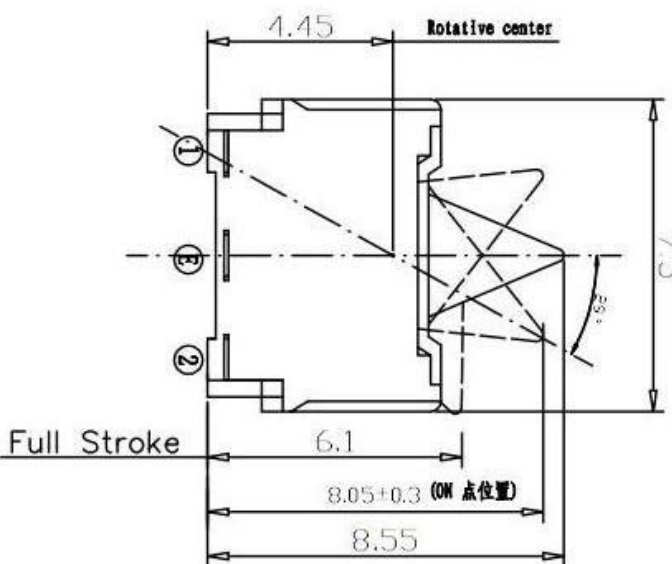

CIRCUIT DIAGRAM

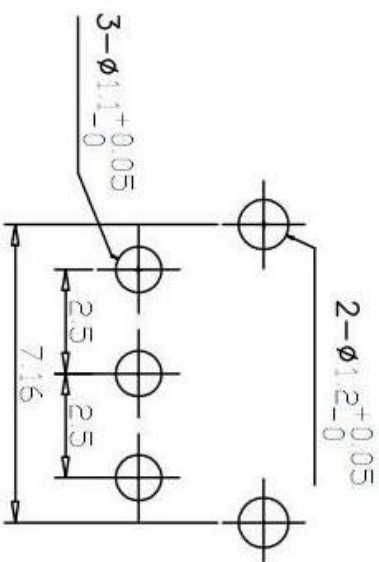

PWB mounting hole for reference

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

NO.	PARTS	DATE	MAT'L	TITLE	QTY	FINISH
E	TERMINAL			PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING			PHOSPHOR BRONZE	1	Ag PLATED
C	COVER			PA46	1	BLACK
B	CASE			PPA	1	BLACK
A	KNOB			PA46	1	BLACK



东莞市高迪电子有限公司
Dong Guan HODI Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	UP TO 5mm	3RD ANGLE	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SIZE
1	塑料外壳及底座	Jack	05/11/15	Up to 5mm	3RD ANGLE	MM		Jack Lu	05/21/15				A4
2	塑料外壳及底座	Jack	05/11/15	Above 5 - 15mm	3RD ANGLE	MM		Jacky Chen	05/21/15				A4
3	塑料外壳及底座	Jack	05/11/15	Above 15 - 30mm	3RD ANGLE	MM		Tony Kao	05/21/15				R2