

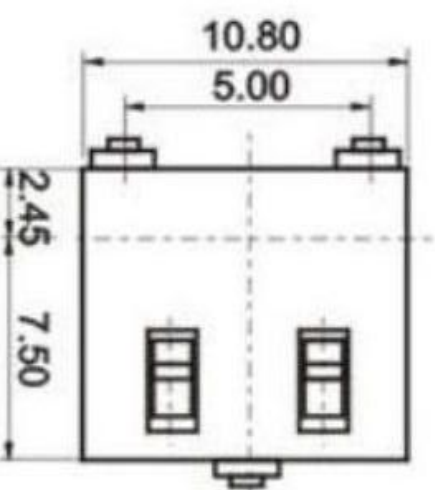


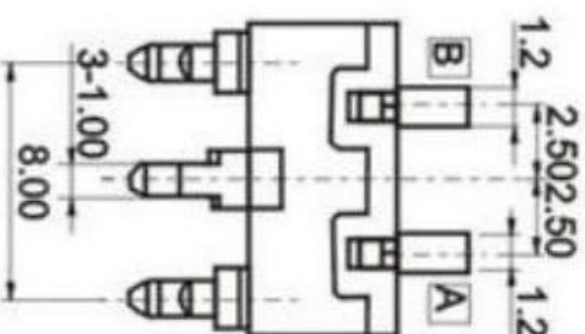

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

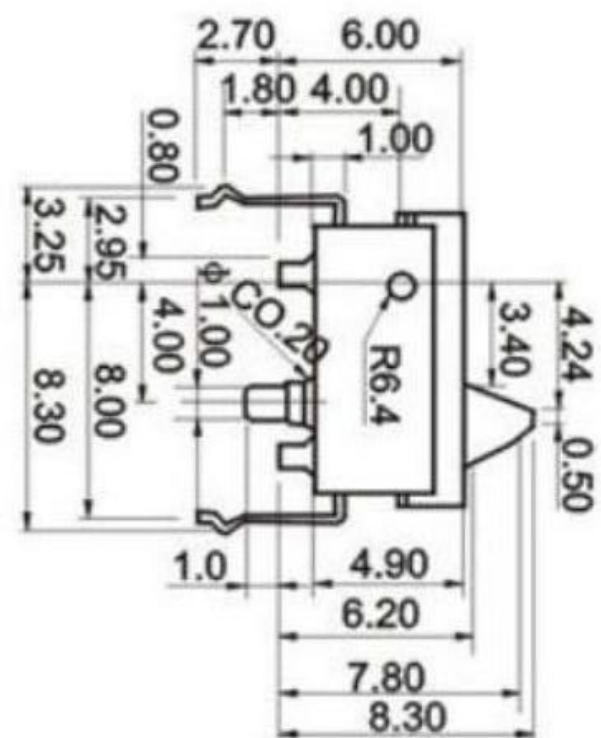

东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

2	塑料固定座及MODULE	Jack	05/11/5	Up to 5 - 15 ±0.2	3RD	ANGEL'S	UNITS	MM	Jack Lu	DATE	MAT'L	TITLE	SWITCH	SIZE
1	塑料固定座及MODULE	Jack	06/11/5	Above 15 - 30 ±0.4	ANGEL'S				Checked By:	DATE	FINISH	MODLE	DETECTOR SWITCH	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE	OTHERWISE STATED:	ANGEL'S				APPROVED BY:	DATE	SCALE	DWG NO.		VER
				Up to 5 - 15 ±0.2					Tony Kao	05/21/15	SHEET NO.	1 of 1	PART NO.	R2