

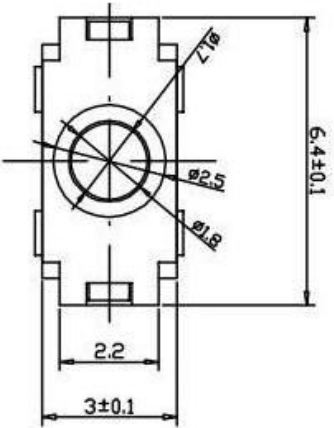


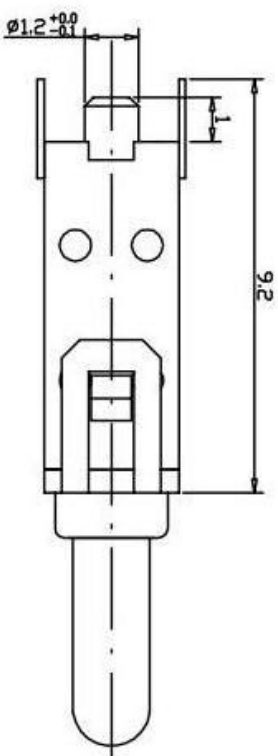

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

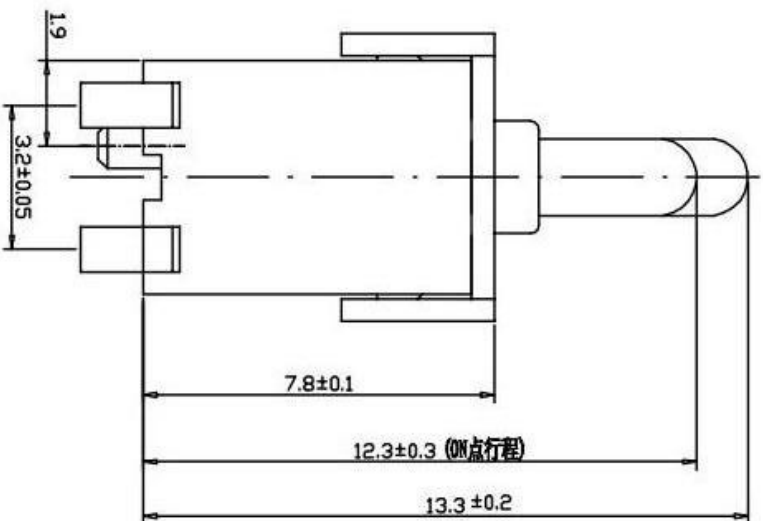

东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

2	更改内容或模块	Jack	05/11/15	Up to 5 - 15 ±0.3	3RD	ANGEL'S	UNITS	MM	Jack Lu	05/21/15	MAT'L	TITLE	SWITCH	SIZE
1	新增内容或模块	Jack	06/11/15	Above 15 - 30 ±0.4					Jacky Chen	05/21/15	FINISH	MODLE	DETECTOR SWITCH	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE	OTHERWISE STATED: Above 30 - 50 ±0.5	ANGEL'S				APPROVED BY: Tony Kao	DATE: 05/21/15	SHEET NO.	1 of 1	PART NO.	VER R2