



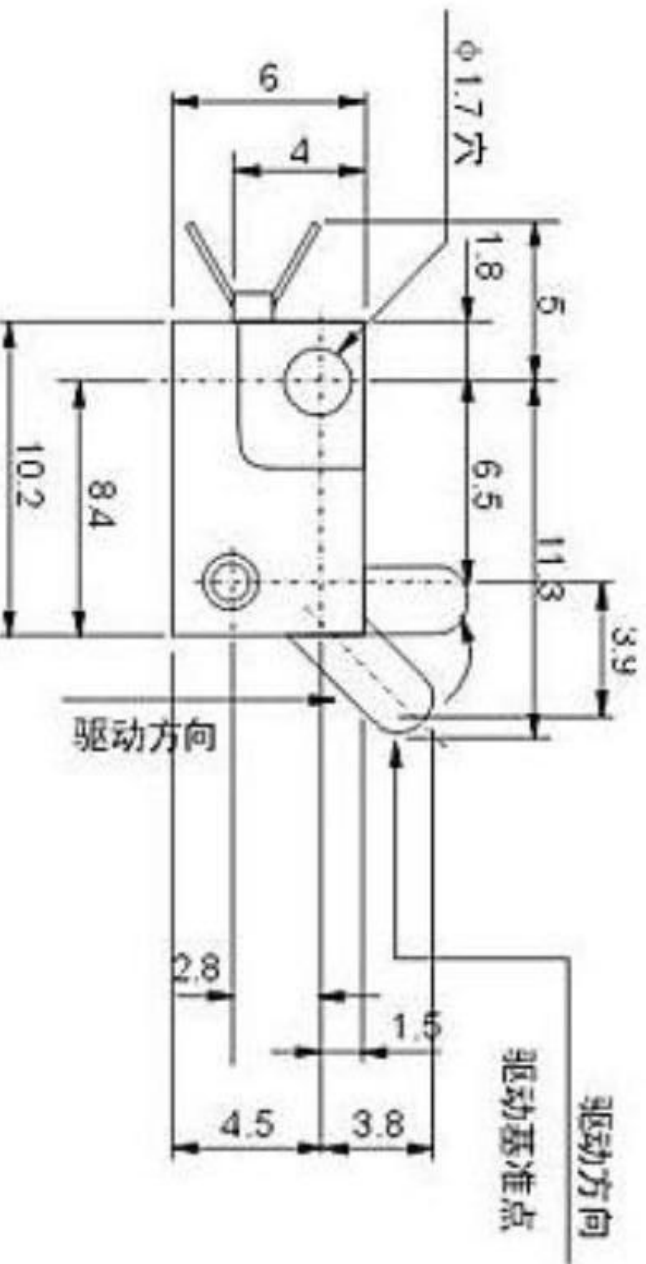

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

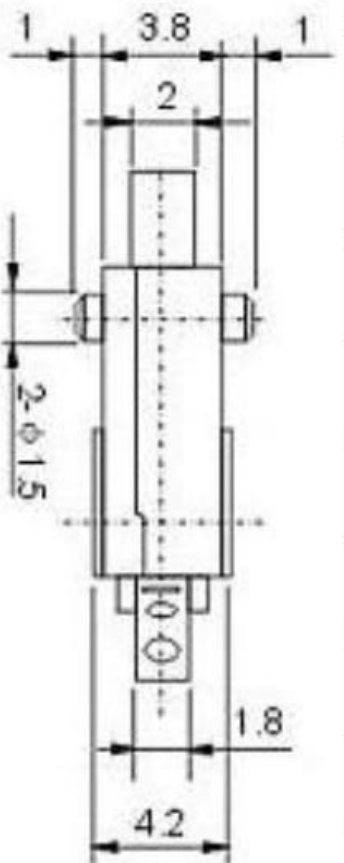

东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

2	规格书及模块MODULE	Jack	05/11/5	TOLERANCE UNLESS OTHERWISE STATED: Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5	3RD ANGELS	UNITS	MM	APPROVED BY: Tony Kao	DATE 05/21/15	SHEET NO.	1 of 1	PART NO.	SIZE A4 VER R2
1	规格书及模块MODULE	Jack	05/11/5					CHECKED BY: Jacky Chen	DATE 05/21/15	FINISH		MODLE	DETECTOR SWITCH
7								DRAWN BY: Jack Lu	DATE 05/21/15	MATL		TITLE	SWITCH