

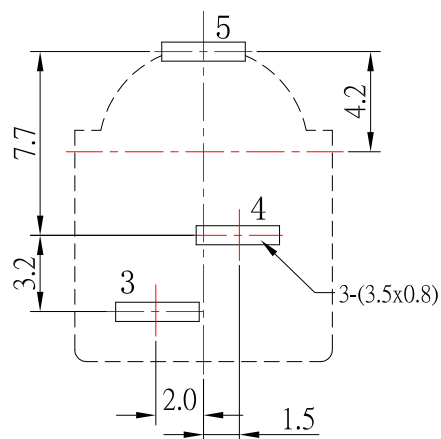
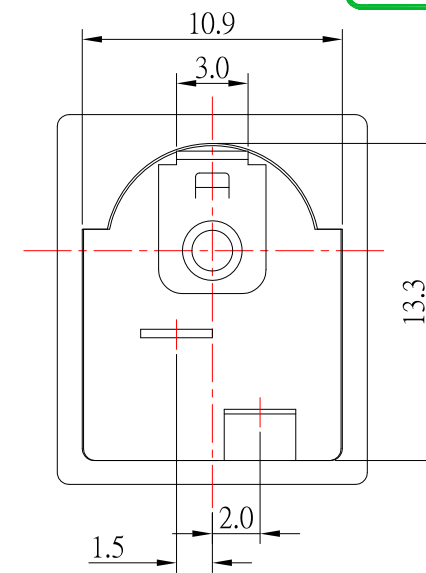
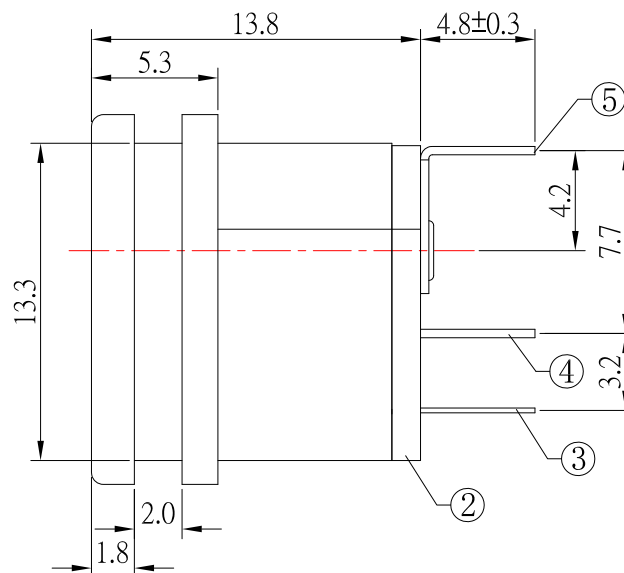


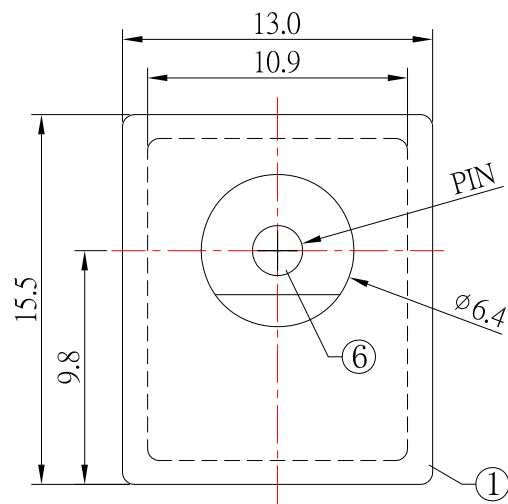

P.C.B LAYOUT
TOP VIEW

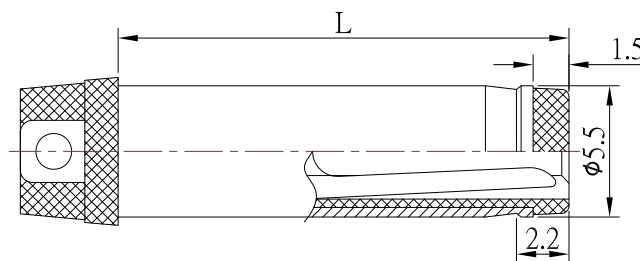

RECOMMENDED PLUG

SPECIFICATION

- Rating : DC 20V , 3.0A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

MODEL NO.	DC-D015-x-S124
SCHEMATIC	
CENTER PIN	$\phi 2.0mm$ $\phi 2.5mm$

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	PIN	1	BRASS	Ni-Plating
5	CONTACT FOOT	1	BRASS	Sn-Plating
4	FLAT PIECE	1	BRASS	Sn-Plating
3	SPRING	1	SUS	Sn-Plating
2	COVER	1	PF	
1	HOUSING	1	PBT	



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	10/18/19			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK DIP TYPE
Jacky Chen	10/18/19			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D015-x-S124
Tony Kao	10/18/19	1 : 1		
		SHEET NO.	PART NO.	DC-D015-x-S124
		1 of 1		

ITEM NO.

DESCRIPTION

DRAWN

DATE

Jack

101819

SIZE
A4
VER
R1