

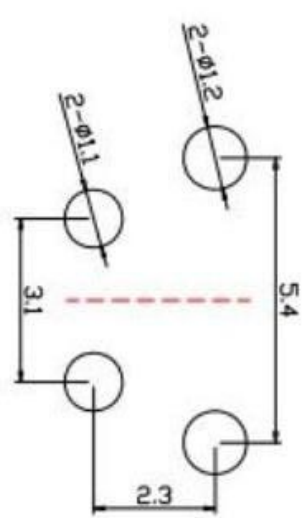
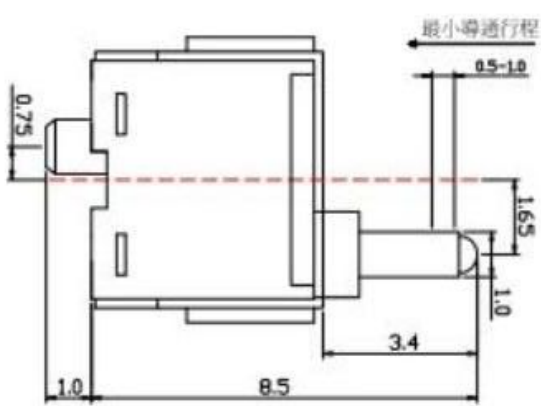
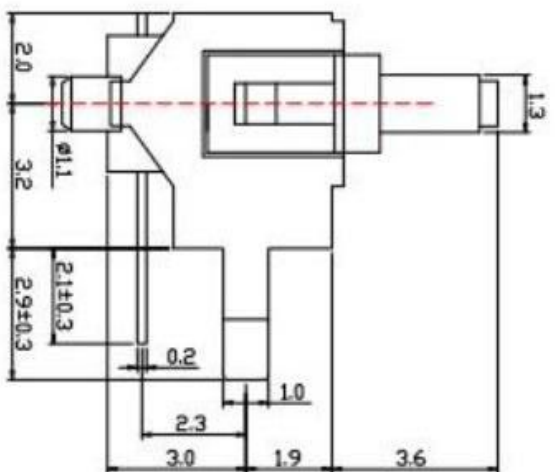


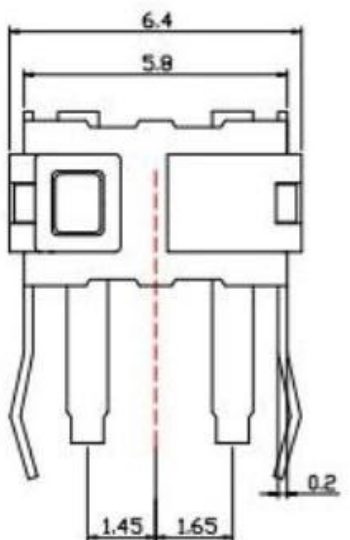

P.C.B LAYOUT

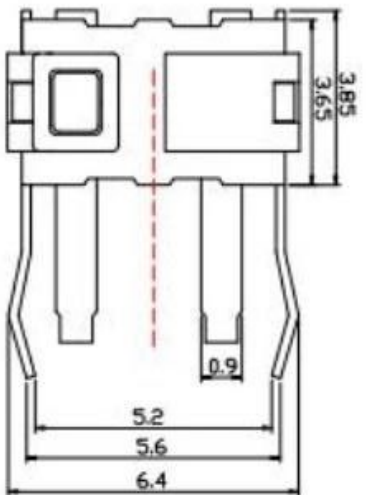

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH



东莞市高迪电子有限公司
Dong Guan KDSR Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:	UP TO 5°	5° ~ 15°	15° ~ 30°	30° ~ 50°	3RD ANGLE	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 OF 1	PART NO.	SIZE	VER
1	零件图	Jack	06/11/15	TOLERANCE UNLESS OTHERWISE STATED:	±0.2	±0.3	±0.4	±0.5	3RD ANGLE	MM		Jacky Chen	05/21/15	SCALE	1:1	DWG NO.	A4	
2	零件图	Jack	06/11/15	TOLERANCE UNLESS OTHERWISE STATED:	±0.2	±0.3	±0.4	±0.5	3RD ANGLE	MM		Tony Kao	05/21/15	SHEET NO.	1 OF 1	PART NO.	R2	