
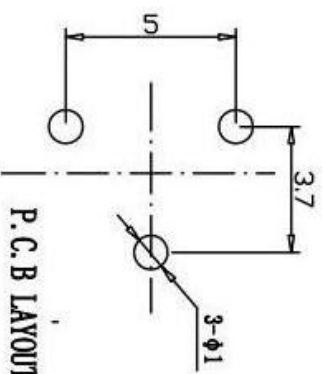
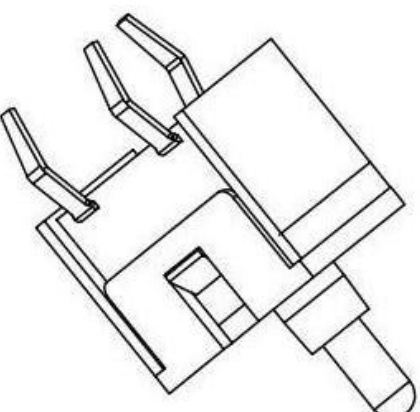
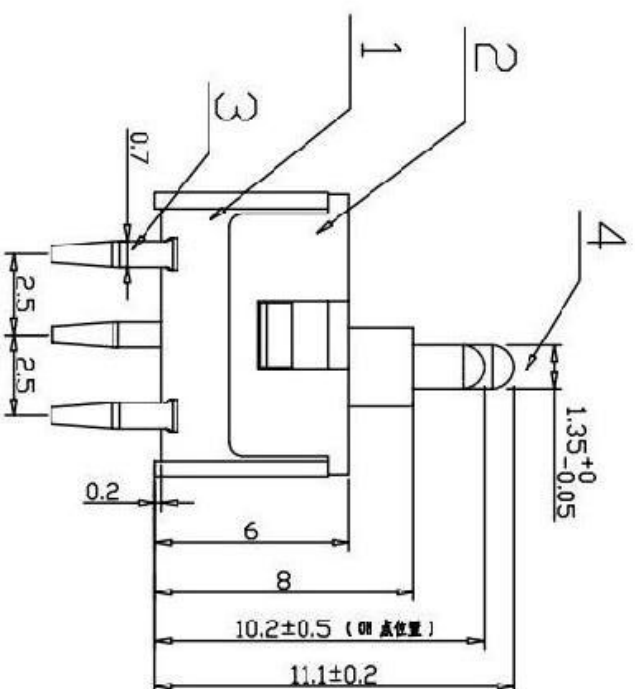


P.C.B LAYOUT

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

SPECIFICATIONS

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

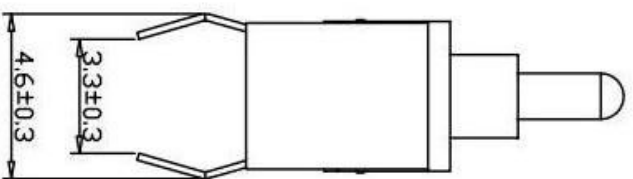

东莞市高迪电子有限公司
Dong Guan HDRR Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN DATE	TOLERANCE UNLESS OTHERWISE STATED: Up to 3/16" Above 3/16" - 1/8" ± 0.03 Above 1/8" - 5/16" ± 0.04 5/16" & Over ± 0.05	3RD. ANGEL'S		UNITS	MM	DRAWN BY: Jack Lu	DATE	MAT'L	TITLE	SWITCH
									05/21/15	FINISH	MODULE	DETECTOR SWITCH
									CHECKED BY: Jacky Chen	DATE	SCALE	DWG NO.
									05/21/15	1 : 1		
2	更新高度为30MM	Jack	05/21/15					APPROVED BY: Tony Kao	DATE	SHEET NO.	PART NO.	SIZE
1	新增高度为30MM	Jack	05/21/15					05/21/15	1 of 1			A4 V8 R2