
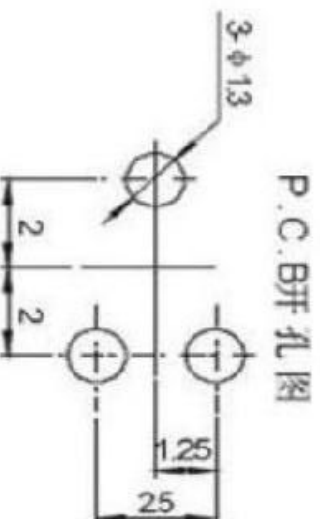
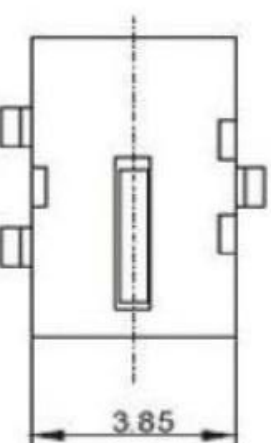
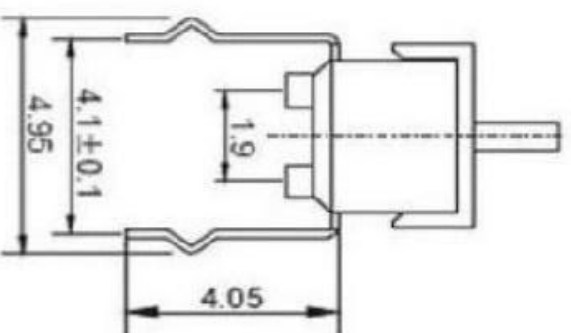


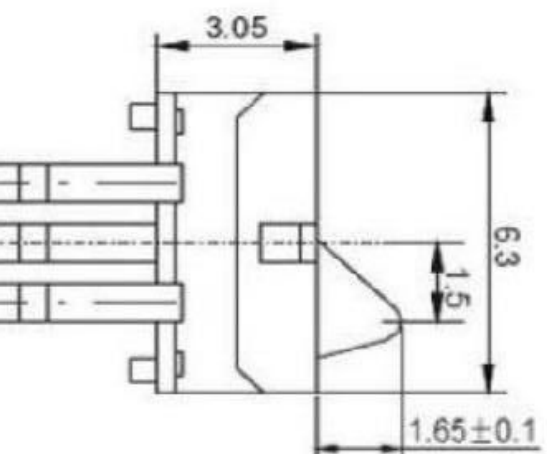

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

NO.	PARTS	DATE	MAT'L	TITLE	QTY	FINISH
E	TERMINAL			PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING			PHOSPHOR BRONZE	1	Ag PLATED
C	COVER			PA46	1	BLACK
B	CASE			PPA	1	BLACK
A	KNOB			PA46	1	BLACK



东莞市高迪电子有限公司
Dong Guan HODI Electronic Switch Jack Co., Ltd.

2	更新設備及MODULE	Jack	05/11/15	TOLERANCE UNLESS OTHERWISE STATED : Up to 5° ±0.2 Above 5° ~ 15° ±0.3 Above 15° ~ 30° ±0.4 Above 30° ~ 50° ±0.5 Above 50° ~ 80° ±0.7	3RD. ANGLES		UNITS	MM	APPROVED BY:	DATE	SCALE	DWG NO.	AD
1	新制高低燈杆K10x60mm	Jack	06/11/15						Tony Kao	05/21/15	1 : 1	S4	
ITEM NO.	DESCRIPTION	DRAWN	DATE						SHEET NO.	PART NO.		VES	R2