



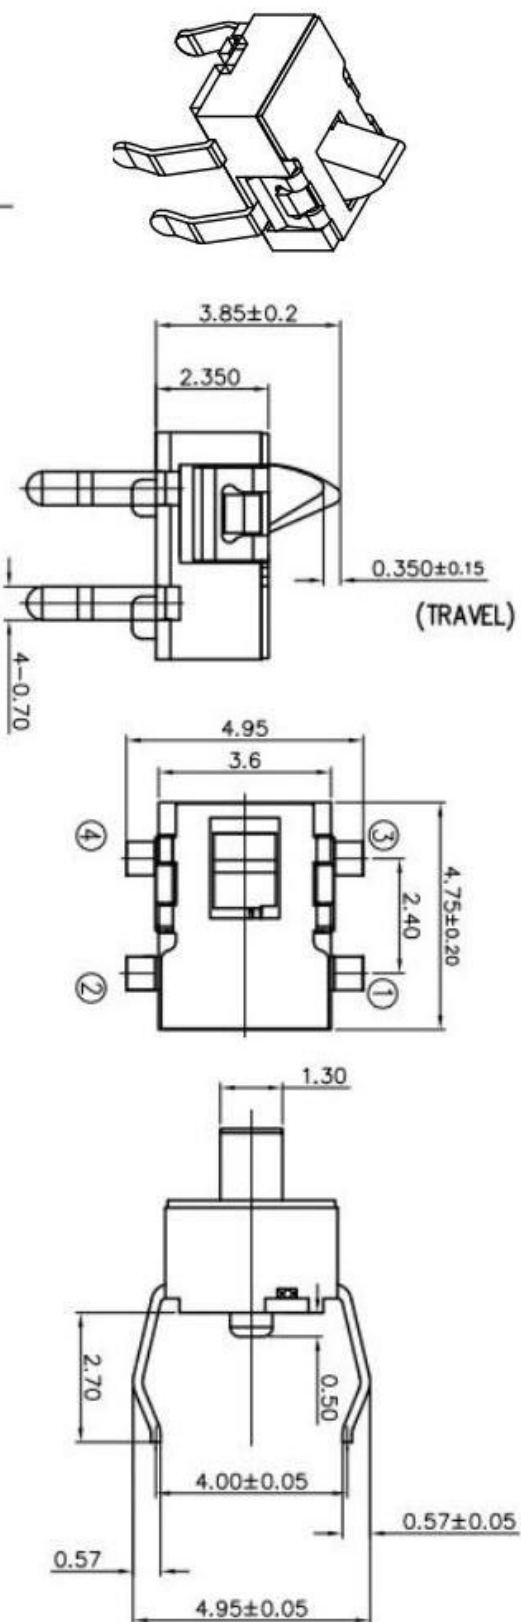


原形图



CIRCUIT DIAGRAM

RECOMMENDED PCB LAYOUT
TOP VIEW (TOL: ± 0.05)

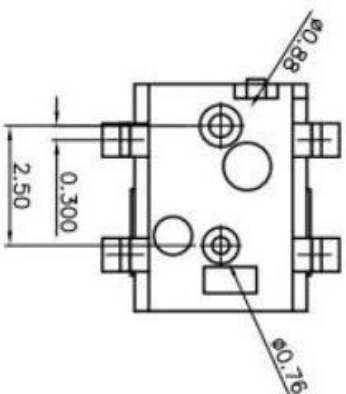

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150m Ω Max
Insulation Resistance	50M Ω Min
Operating Force	40 $\pm$ 15gf
Life	50,000 cycles

NO.	PARTS	DATE	MAT'L	QTY	FINISH
E	TERMINAL			4	Ag PLATED
D	CONTACT SPRING			1	Ag PLATED
C	COVER			1	BLACK
B	CASE			1	BLACK
A	KNOB			1	BLACK

MATERIALS

TITLE

SWITCH

DETECTOR SWITCH



东莞市高迪电子有限公司
Dong Guan KDR Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:	3RD. ANGEL'S	UNITS	MM	CHECKED BY:	DATE	FINISH	SCALE	DWG NO.	PART NO.	SIZE	VER
1	塑料外壳及底座	Jack	05/11/15	Up to 5 - ± 0.3 Above 5 - ± 0.4 Above 15 - ± 0.5 Above 30 - ± 0.5 Above 50 - ± 0.5	3RD. ANGEL'S	MM	1	Jacky Chen	05/21/15	1:1	1 of 1			A4	R2
2	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15						
3	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15						
4	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15						
5	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15						
6	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15						
7	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15						