

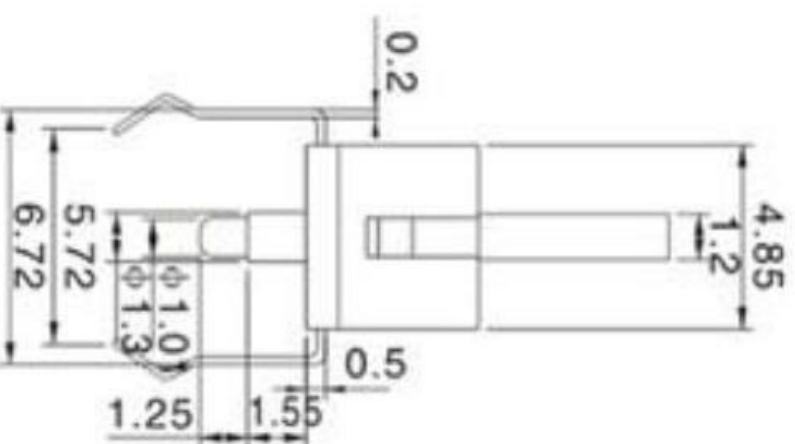


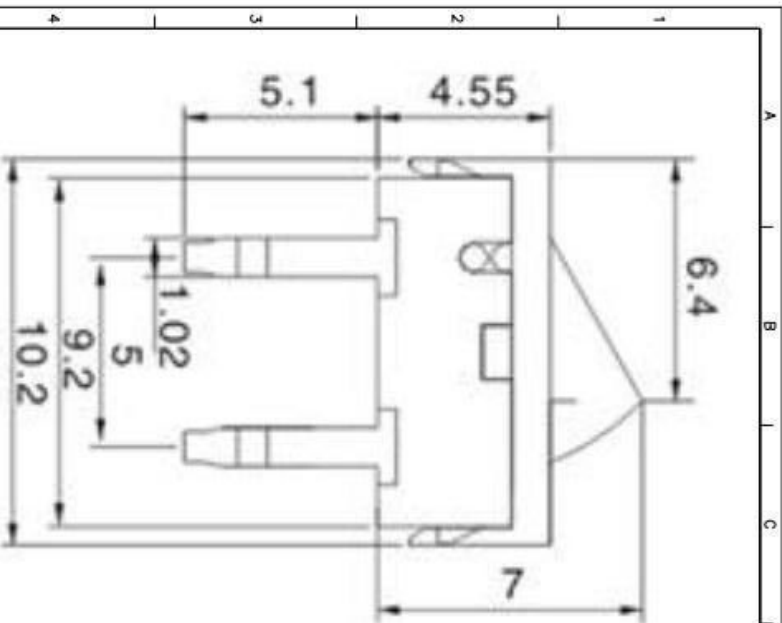

P.C.B.Land Pattern

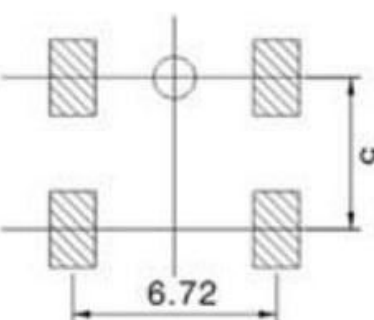

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

NO.	PARTS	DATE	MAT'L	TITLE	QTY	FINISH
E	TERMINAL			PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING			PHOSPHOR BRONZE	1	Ag PLATED
C	COVER			PA46	1	BLACK
B	CASE			PPA	1	BLACK
A	KNOB			PA46	1	BLACK



东莞市高迪电子有限公司
Dong Guan HODI Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:	3RD. ANGELS	UNITS	MM	CHECKED BY:	DATE	FINISH	SCALE	DWG NO.	PART NO.	SIZE
1	塑料外壳及底座	Jack	05/11/15	Up to 5 - ±0.3 Above 5 - ±0.4 Above 15 - 30 ±0.5 Above 30 - 50 ±0.5 Angle	3RD. ANGELS		MM	Jack Lu	05/21/15	FINISH	1:1			A4
2	塑料外壳及底座	Jack	05/11/15					Jacky Chen	05/21/15	SCALE				VER
7								APPROVED BY:	DATE	SHEET NO.	1 of 1			R2
								Tony Kao	05/21/15					