
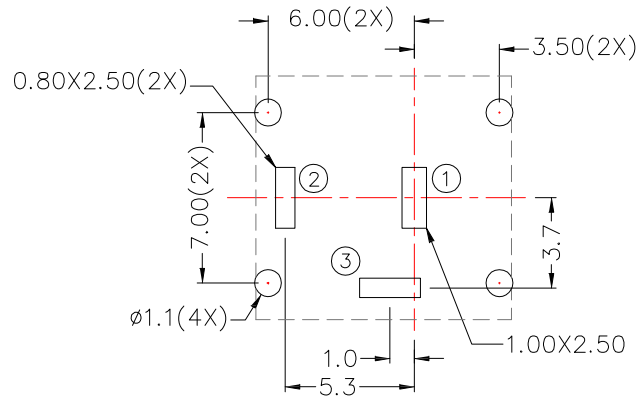
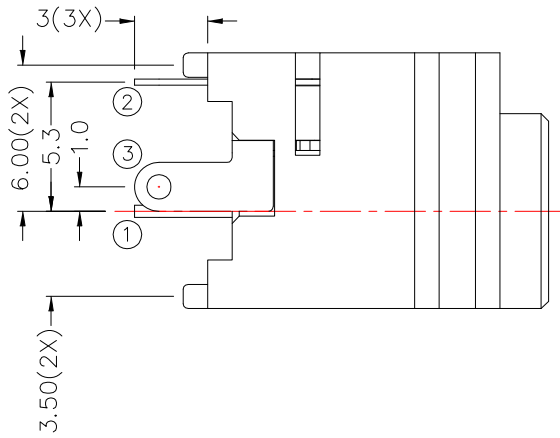
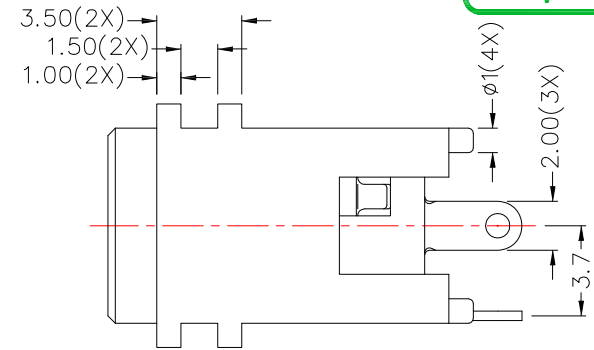
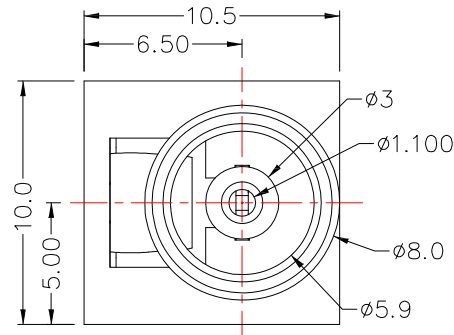


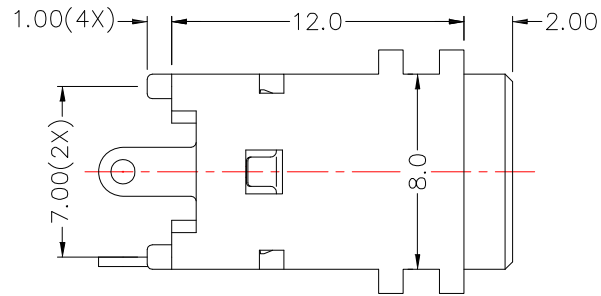


PCB LAYOUT
(TOP VIEW)

SPECIFICATION


- 1.Rating :DC 24V 3.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

* MATERIAL

TERMINAL 1 :BRASS(Matte Tin Plated)
TERMINAL 2 :PHOSPHOR BRONZE(Matte Tin Plated)
TERMINAL 3 :BRASS(Matte Tin Plated)
HOUSING :PA66



DC MATE PLUG

MODEL NO.	DC-092-1.0
SCHEMATIC	



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
12/03/14
DATE
12/03/14
DATE
12/03/14

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK 端子鍍霧錫
DC-092-1.0-TN

SIZE
A4
VER
R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新MODLE	Jack	120314
2	新增端子鍍層	Jack	111214
1	新增SPEC	Jack	081214