

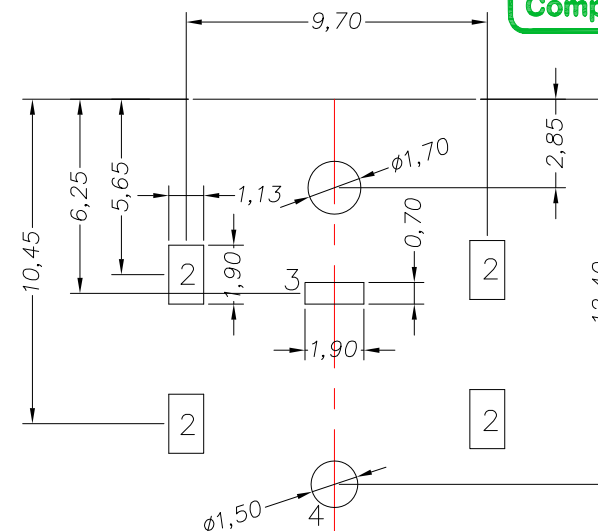
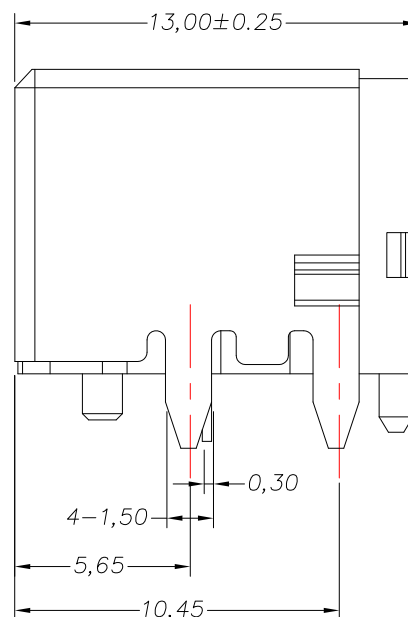


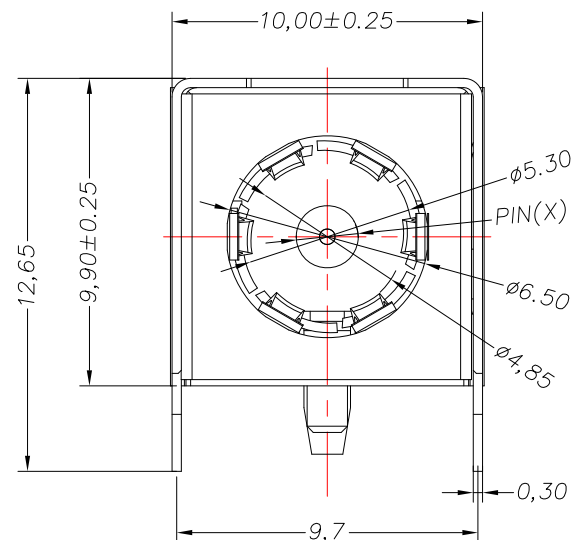

P.C.B LAYOUT
TOP VIEW

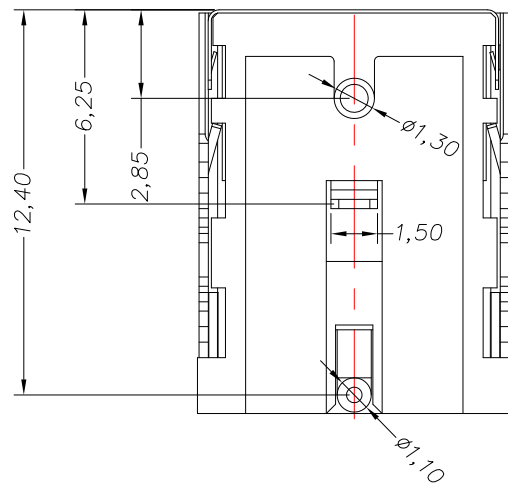

Model NO.	DC-081HS-2.0	DC-081HS-2.5
PIN(X)	φ2.0	φ2.5

MODEL NO.	DC-081HS-x
SCHEMATIC	2
	4
	3

SPECIFICATION

- Rating : DC 20V, 10.0A
- Contact resistance : ≤ 30mΩ
- Insulation resistance : ≥ 100MΩ
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

6	COVER	1	COPPER ALLOY	Ag-Plating
5	SPACER	1	PA9T (BLACK)	
4	BERRY PIN	1	COPPER ALLOY	Ag-Plating
3	CCAW	1	COPPER ALLOY	Ag-Plating
2	FOOT COVERLET	1	COPPER ALLOY	Ag-Plating
1	HOUSING	1	PA9T (BLACK)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8	更新圖面	Jack	052319	10	更新樣式	Jack	111819
7	更新圖面	Jack	052219	9	更新尺寸及樣式	Lan	071619
6	更新圖面	Jack	043018				
5	更新材質	Jack	010518				
4	更新圖面	Jack	122517				
3	更新材質	Jack	051117				
2	更新Rating	Jack	062016				
1	新增SPEC及PIN選項	Jack	121515				
ITEM NO.	DESCRIPTION	DRAWN	DATE				



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/18/19			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	11/18/19			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-081HS-x-S214
Tony Kao	11/18/19	1 : 1		
		SHEET NO.	PART NO.	DC-081HS-x-S214
		1 of 1		
				SIZE A4
				VER R10