




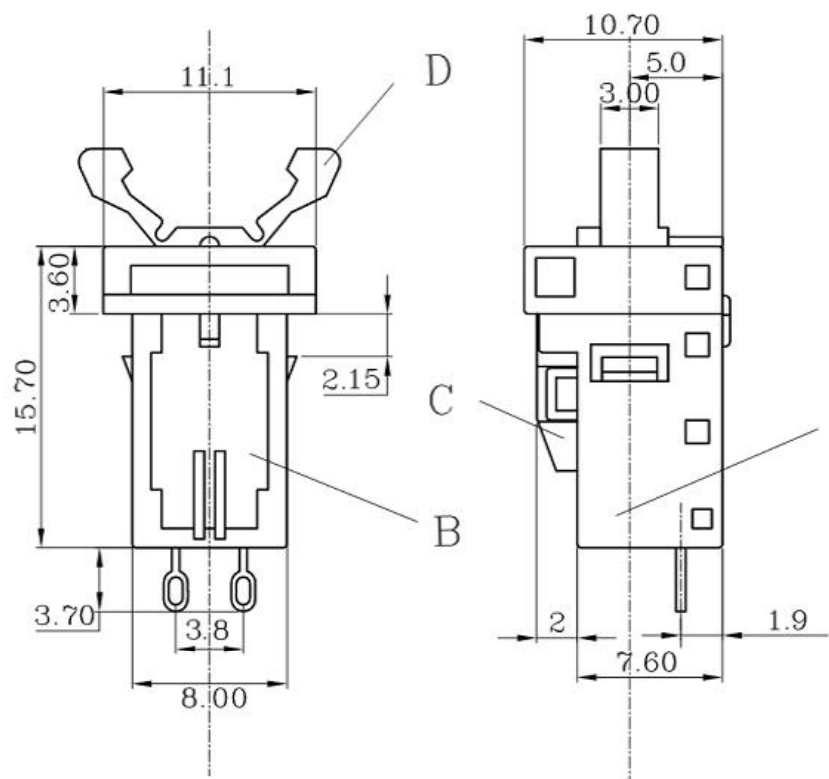


电路图

下压锁止行程: 5.4mm
解锁行程: 1.5mm

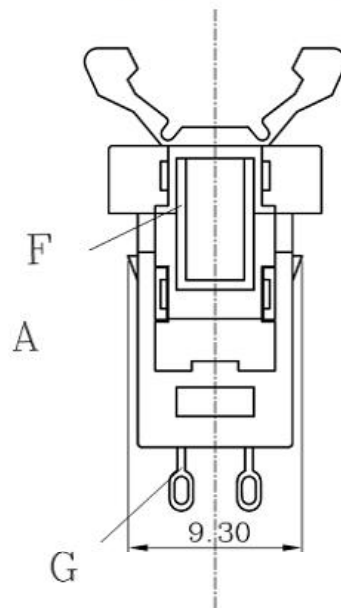

建议挂钩尺寸

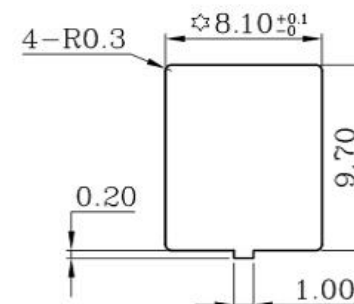

建议安装孔尺寸



锁住状态

解锁状态

产品构造			
A	外壳	PA66	零部件
B	盖板	PBT	
C	压簧片	POM	
D	推轴	PA6	
E	接触簧	磷铜镀银	
F	钩针	钢丝	
G	接脚	黄铜镀银	
H	弹簧	T9A镀镍	

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED		8				
PART NO.	Lock switch	CHECKED		UP TO 5	±0.2	6				
DRAW NO.	GD-PR-2	APPROVED		ABOVE 5 ~ 30	±0.3	5				
SCALE: 2:1		UNIT: mm	DATE:	ABOVE 30 ~ 50	±0.4	4				
				ABOVE 50	±0.5	3	SPRING	SUS	1	Ni PLATED
				ANGLE	±3°	2	HOUSING	POM	1	BLACK
						1	SLIDER	PA12	1	BLACK
						NO.	PARTS	MATERIAL	QTY.	FINISHING
DONG GUAN GAODI ELECTRONICS CO., LTD.										

東莞市高迪電子有限公司