


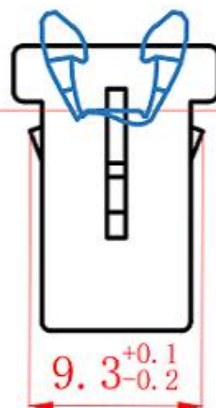
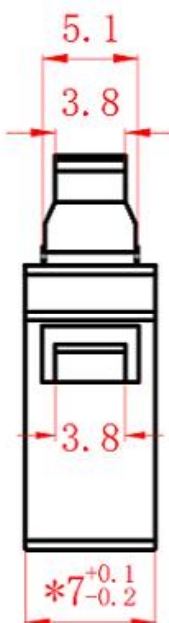


解锁状态 →

下压5.6mm达到锁定行程 →


回弹1.1mm为锁住状态 → 继续下压1.1mm即达到解锁行程

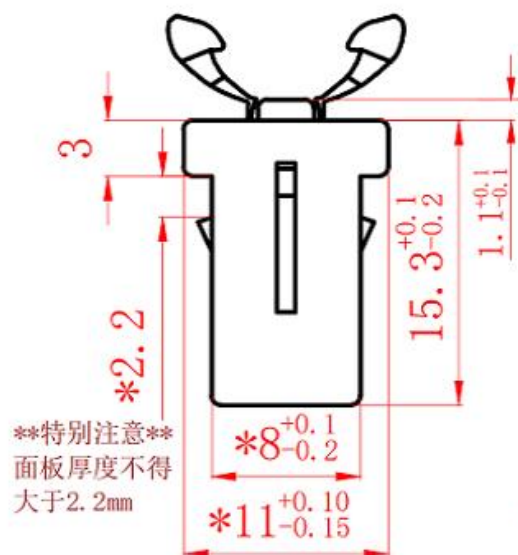


材料清单:
外 壳: POM
按 键: PA66
弹 簧: SUS304
钩 针: SUS304
脱 钩 力: $\geq 20\text{N}$

注: 未标注公差尺寸为 $\pm 0.1\text{mm}$

!!! 特别注意!!!
两侧圆角R必须 ≥ 0.4
否则锁舌会勾住爪子,
不易分离



安装孔尺寸

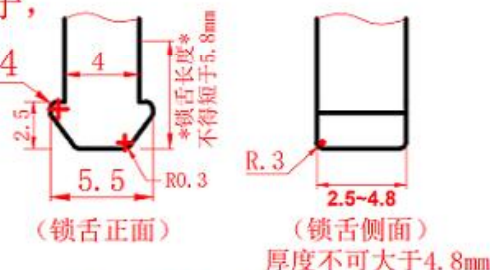

锁舌参考尺寸

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.	Lock switch	CHECKED		UP TO 5	± 0.2	6			
DRAW NO.	GD-PR-1Q	APPROVED		ABOVE 5 ~ 30	± 0.3	5			
				ABOVE 30 ~ 50	± 0.4	4			
				ABOVE 50	± 0.5	3	SPRING	SUS	1 Ni PLATED
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	$\pm 3^\circ$	2	HOUSING	POM	1 BLACK
						1	SLIDER	PA12	1 BLACK
						NO.	PARTS	MATERIAL	QTY. FINISHING
DONG GUAN GAODI ELECTRONICS CO., LTD.									

東莞市高迪電子有限公司