


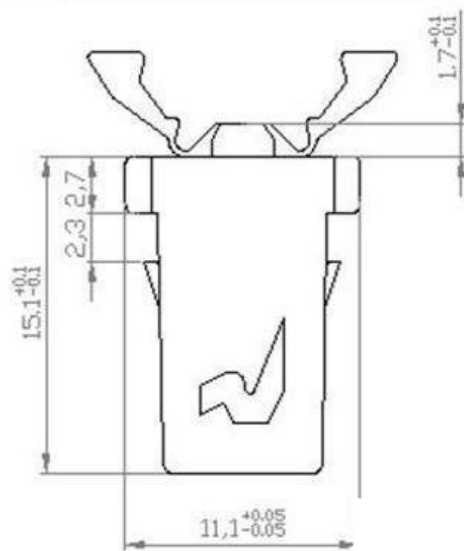
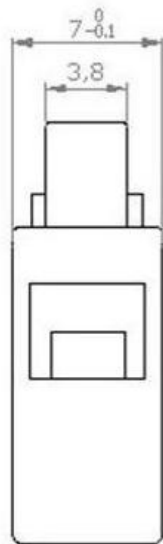


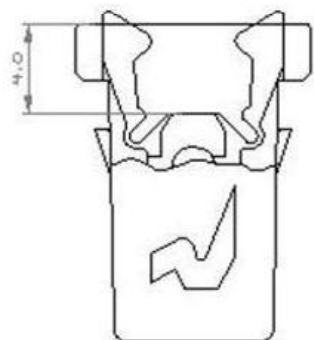


开启状态

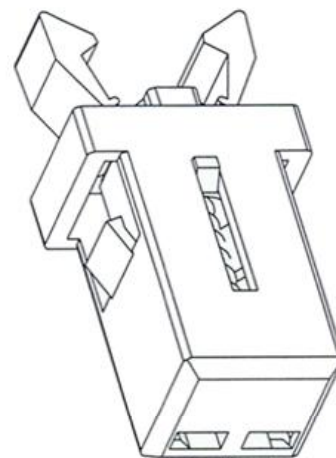

下压最大位置

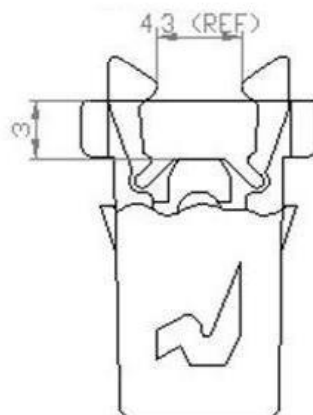


锁住状态



安装孔尺寸


材料清单: 抗拉力:15N以下
 外壳: PC 寿命: 8000次以上
 爪子: PA 操作力:5N±2N
 钩子: POM
 弹簧: 碳钢镀镍

锁舌参考尺寸

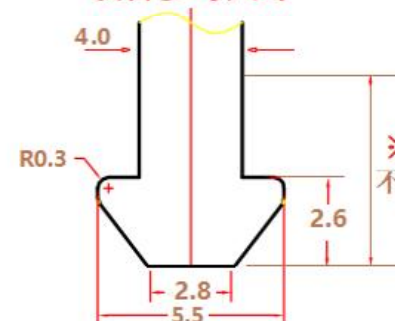

※ 锁舌长度
不得短于6.6mm

※ 注: 锁舌厚度或者直径不能大于4.8mm

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED		8									
PART NO.	Lock switch	CHECKED		UP TO 5	±0.2	7									
DRAW NO.	GD-PR-1X	APPROVED		ABOVE 5 ~ 30	±0.3	6									
SCALE: 2:1		UNIT: mm		DATE:				ABOVE 30 ~ 50	±0.4	5					
								ABOVE 50	±0.5	4					
								ABOVE 50	±0.5	3	SPRING	SUS	1	Ni PLATED	
								ANGLE	±3'	2	HOUSING	POM	1	BLACK	
 東莞市高迪電子有限公司						1		SLIDER		PA12		1		BLACK	
						NO.		PARTS		MATERIAL		QTY.		FINISHING	
														DONG GUAN GAODI ELECTRONICS CO., LTD.	

東莞市高迪電子有限公司