

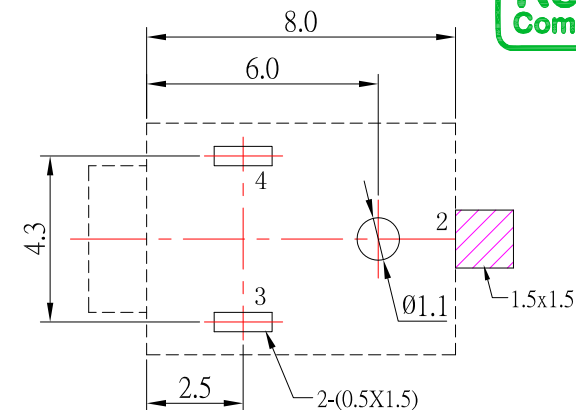

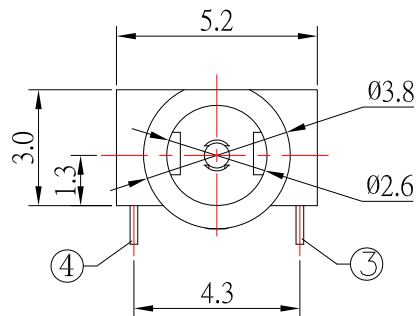
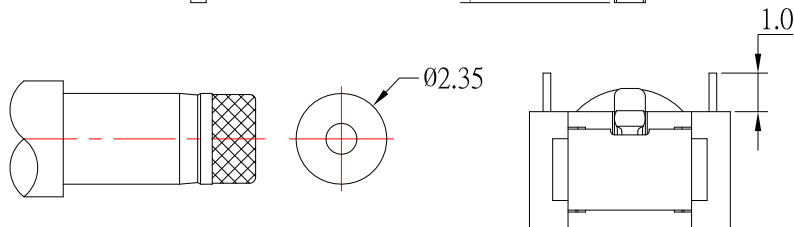
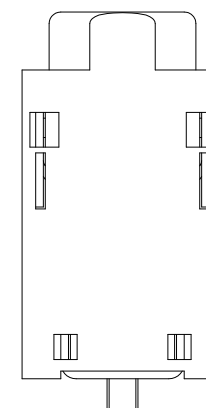
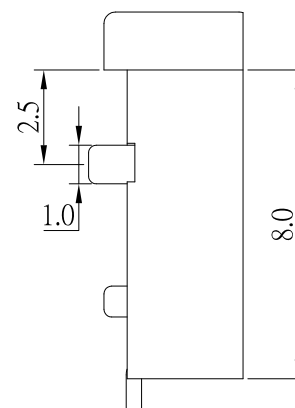


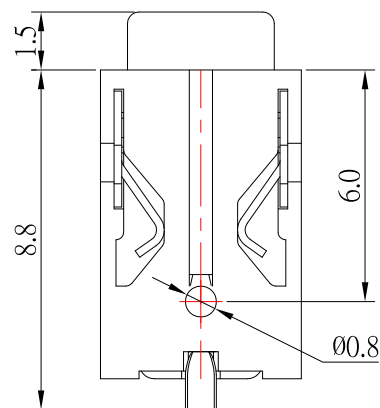

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 2-20N;
6. life test : 5,000 cycles °

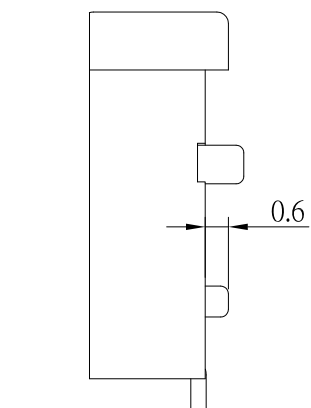

DC MATE PLUG

5	CONTACT FOOT	1	BRASS	Ag-Plating
4	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
2	PIN	1	BRASS	Ag-Plating
1	HOUSING	1	PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/27/17			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	03/27/17			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-064D-3-S124
Tony Kao	03/27/17	1 : 1		
		SHEET NO.	PART NO.	DC-064D-3-S124
		1 of 1		

1	更新PCB LAYOUT尺寸及更新A0版	Jack	032717
ITEM NO.	DESCRIPTION	DRAWN	DATE