

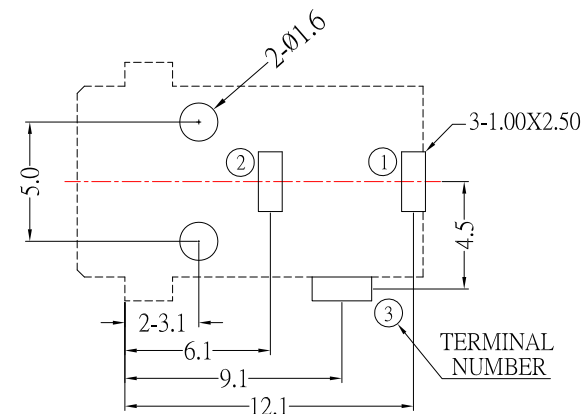
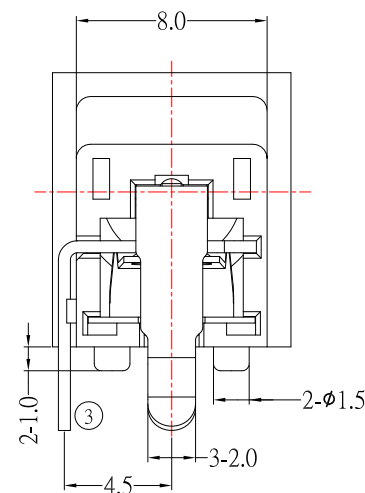
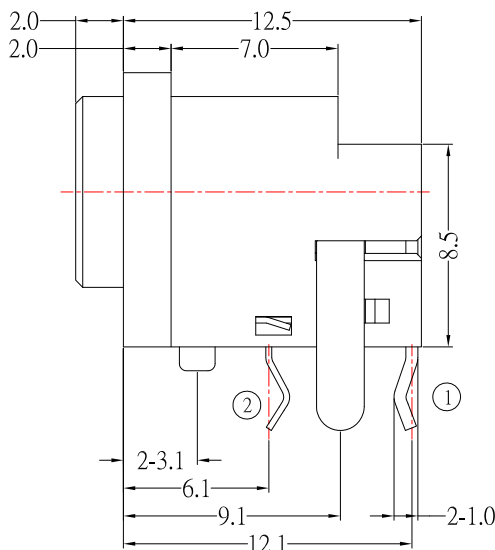


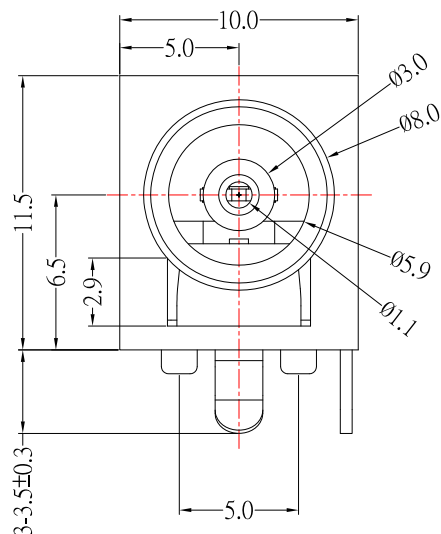

PCB LAYOUT

MODEL NO.	DC-058-2-1.0-TN
SCHEMATIC	

DC MATE PLUG



SPECIFICATION

- 1.Rating : DC 24V 3.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/23/14

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

DC JACK

DC-058-2-1.0-TN

DC-058-2-1.0-TN

SIZE

A4

VER

R