


SCHEMATIC (NON-SHORTING)

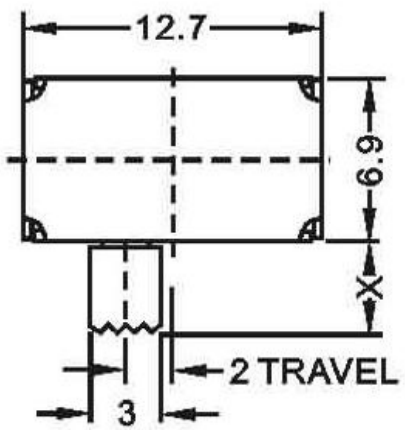

| X(mm) |
|-------|
| 2mm |
| 3mm |
| 4mm |
| 5mm |
| 6mm |
| 7mm |
| 8mm |
| 9mm |

SPECIFICATIONS

| | |
|-------------------------|--------------|
| Rating | DC 50V 0.5A |
| Circuit | |
| Contact Resistance | 200mΩ Max. |
| Insulation Resistance | 100MΩ Min. |
| Operating Force | 250gf ±100gf |
| Operating Life (cycles) | 10,000 |

| NO. | DESCRIPTION | QTY | MATERIAL | REMARK |
|-----|--------------|-----|-----------------|-----------|
| 7 | STEEL BALL | 1 | STAINLESS | Natural |
| 6 | SPRING | 1 | STAINLESS | Natural |
| 5 | CONTACT CLIP | 1 | PHOSPHOR BRONZE | Ag-plated |
| 4 | TERMINAL | 4 | BRASS | Ag-plated |
| 3 | BASE | 1 | PHENOLIC RESIN | Natural |
| 2 | FRAME | 1 | SPCC | Ni-Plated |
| 1 | KNOB | 1 | POM | Black |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|----------|
| 3 | 新增SPEC | Jack | 11/2014 |
| 2 | 更新材質 | Jack | 04/2014 |
| 1 | 更新尺寸6.0改5.8 | Jack | 03/17/14 |


东莞市高迪电子有限公司
 Dong Guan KDRR Electronic Switch Jack Co., Ltd.

| | | | | |
|------------------------------------|--------------------|--------------|-------|----|
| TOLERANCE UNLESS OTHERWISE STATED: | Up to 5 ±0.2 | 3RD. ANGEL'S | UNITS | MM |
| | Above 5 ~ 15 ±0.3 | | | |
| | Above 15 ~ 30 ±0.4 | | | |
| | Above 30 ~ 50 ±0.5 | | | |
| | Angle ±0.3 | | | |

| | | | | |
|--------------|----------|-----------|----------|--------------|
| DRAWN BY: | DATE | MAT'L | TITLE | SWITCH |
| Jack Lu | 11/20/14 | | | |
| CHECKED BY: | DATE | FINISH | MODLE | SLIDE SWITCH |
| Jacky Chen | 11/20/14 | | | |
| APPROVED BY: | DATE | SCALE | DWG NO. | SIZE |
| Tony Kao | 11/20/14 | 1:1 | | A4 |
| | | SHEET NO. | PART NO. | VER |
| | | 1 of 1 | | R3 |