

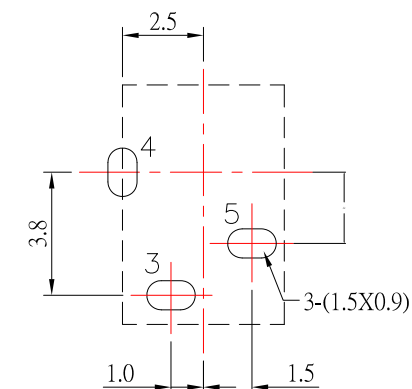
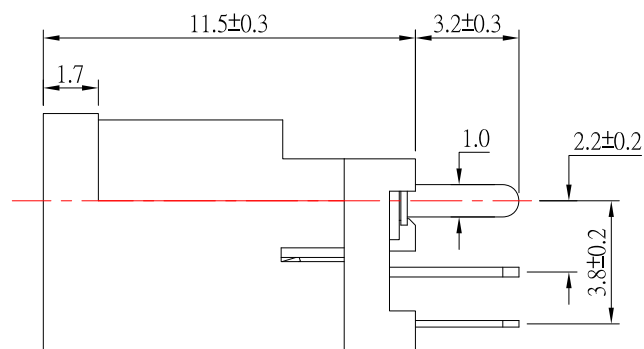


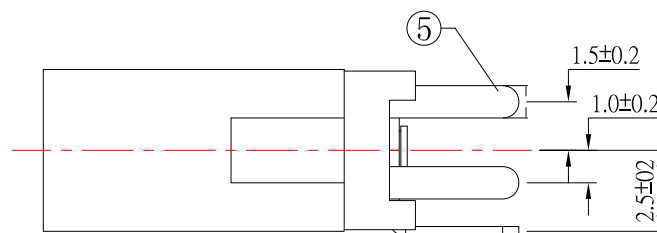

P.C.B LAYOUT
TOP VIEW

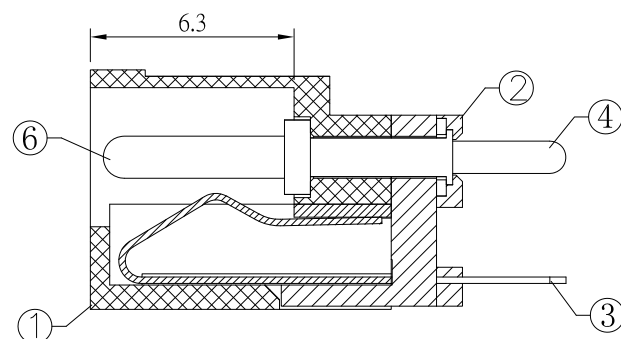

SPECIFICATION

- 1.Rating : DC 30V 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

MODEL NO.	DC-009V-1.65
SCHEMATIC	

6	PIN	1	BRASS	Ni-PLATED
5	CURVE PIECE	1	BRASS	Sn-PLATED
4	FLAT PIECE	1	BRASS	Sn-PLATED
3	SPRING	1	SUS	Sn-PLATED
2	COVER	1	PBT/LCP	
1	HOUSING	1	PBT/LCP	
NO.	DESCRIPTION	QTY	MATERIAL	FINISH

DRAWN BY: DATE		MATERIAL	TITLE	JACK	
Jack Lu	07/28/17				
CHECKED BY: DATE		FINISH	MODLE	DC JACK	
Jacky Chen	07/28/17				
APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	DC-009V-1.65-S124
Tony Kao	07/28/17				
SHEET NO.		1 of 1	PART NO.	DC-009V-1.65-S124	



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------