

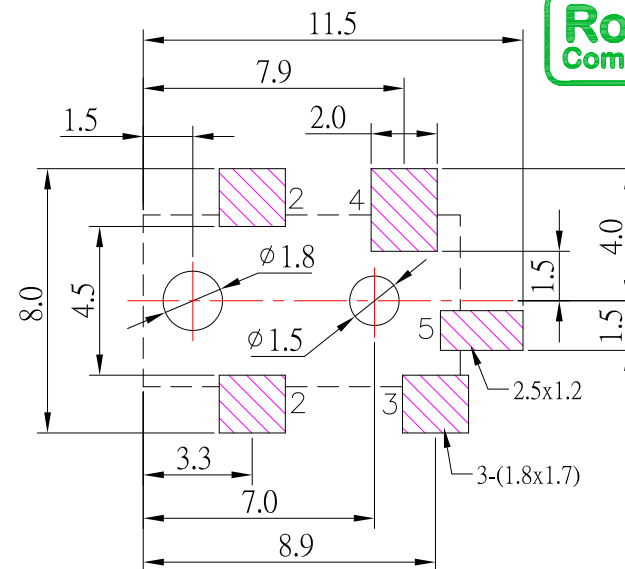
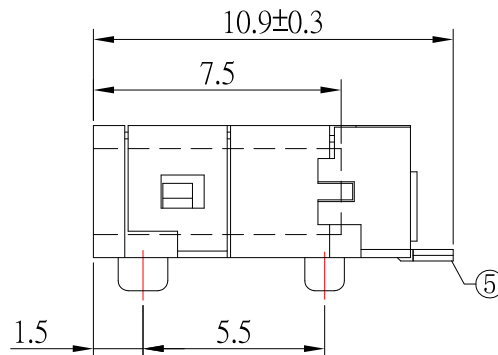
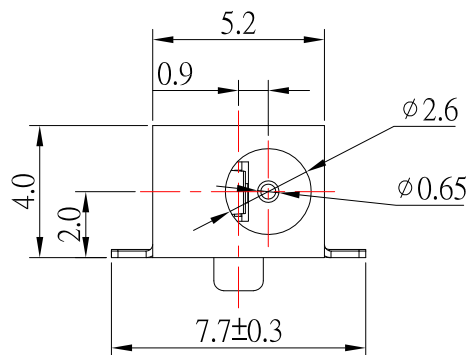
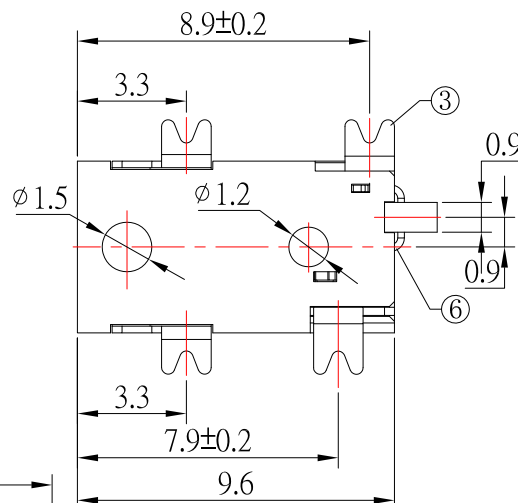


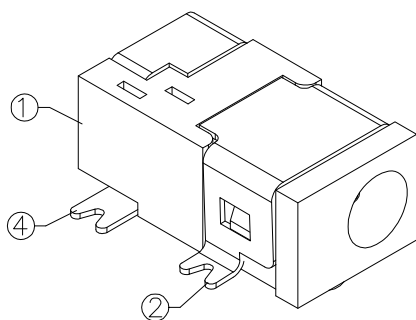


P.C.B LAYOUT
TOP VIEW



MODEL NO.	DC-S041-0.65
SCHEMATIC	

SPECIFICATIONS

- Rating : DC 30V , 1.0A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 2-20N ;
- life test : 5,000 cycles .

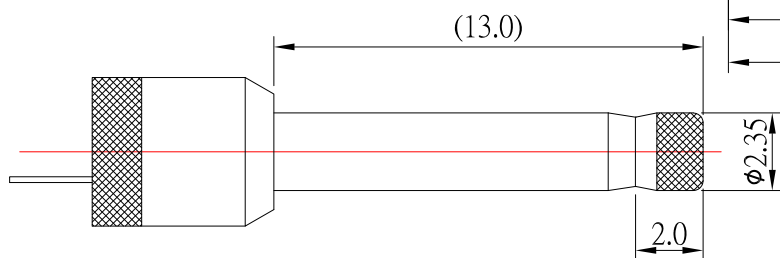

RECOMMENDED PLUG

6	CONTACT FOOT	1	BRASS	Ag-Plating
5	PIN	1	BRASS	Ag-Plating
4	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	CONTACT FOOT	1	BRASS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	新增尺寸	Jack	072319
4	新增尺寸及更新SPEC和材質	Jack	110718
3	更新圖面	Jack	102717
2	更新為AO版	Jack	012517
1	更新Rating	Jack	011617
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 07/23/19

CHECKED BY: DATE

Jacky Chen 07/23/19

APPROVED BY: DATE

Tony Kao 07/23/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

DC JCAK

DC-S041-0.65-S124

DC-S041-0.65-S124

SIZE

A4

VER

R5