

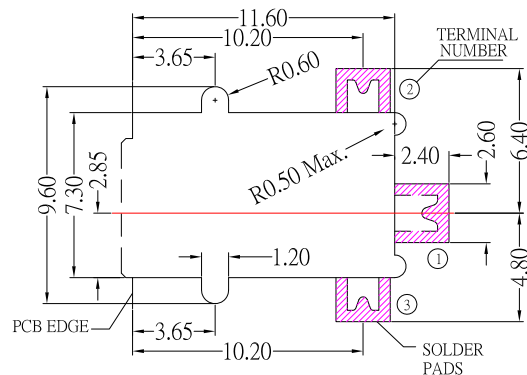



MODEL NO.	DC-095DH
SCHEMATIC	
CENTER PIN	Ø1.65mm


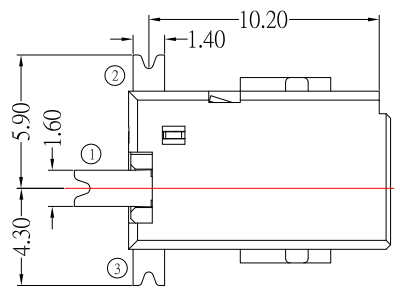


* MATERIAL

TERMINAL 1	:BRASS
TERMINAL 2	:PHOSPHOR BRONZE
TERMINAL 3	:BRASS
HOUSING	:PA6T
CENTER PIN	:BRASS

SPECIFICATION

- 1.Rating : DC 16V 5.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles



P.C.B LAYOUT MOUNTING PATTERN (TOP VIEW)



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
08/12/14
DATE
08/12/14
DATE
08/12/14

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

JACK
DC JACK
DC-095DH-1.65

SIZE
A4
VER
R2