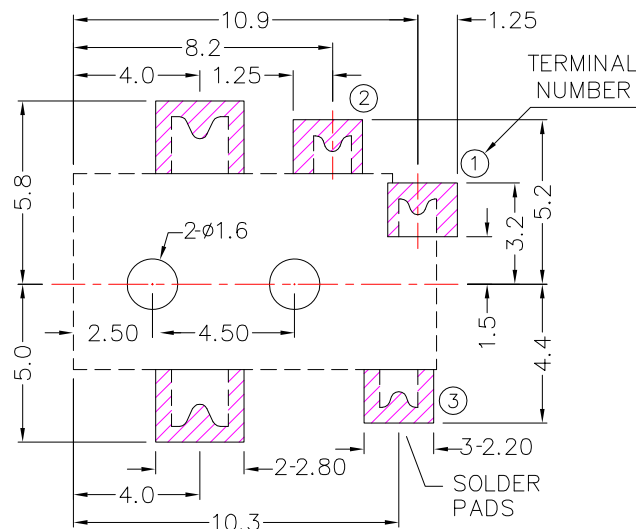
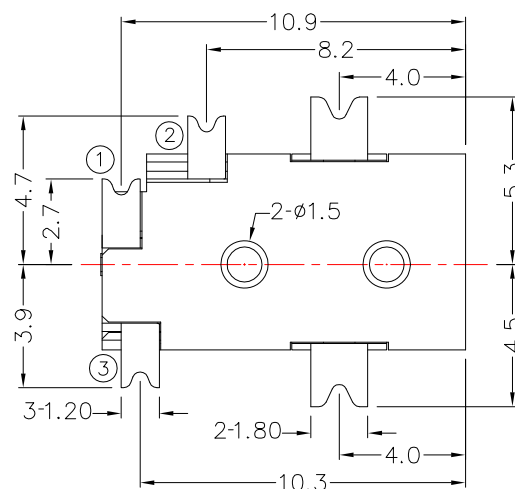

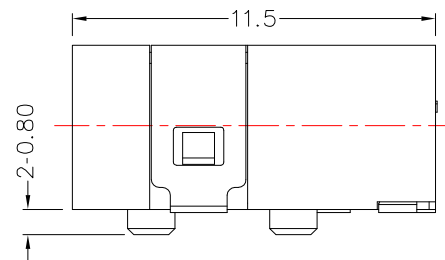
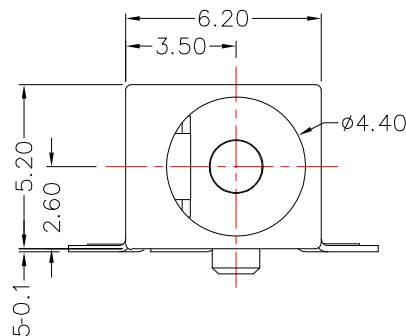
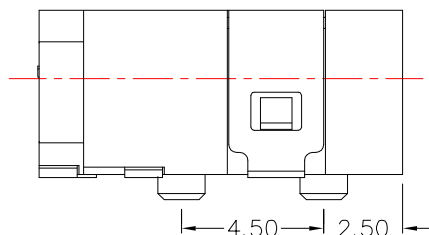



DC MATE PLUG

MODEL NO.	DC-068DS
SCHEMATIC	
CENTER PIN	ø1.65mm

*MATERIAL

TERMINAL 1 : BRASS
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : BRASS
SHIELD : PHOSPHOR BRONZE
COVER : PA6T

SPECIFICATION

1. Rating : DC 16V 2.5A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
08/11/14
DATE
08/11/14
DATE
08/11/14

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK
SCALE	1 : 1	DWG NO.	DC-068DS
SHEET NO.	1 of 1	PART NO.	DC-068DS

SIZE
A4
VER
A1