

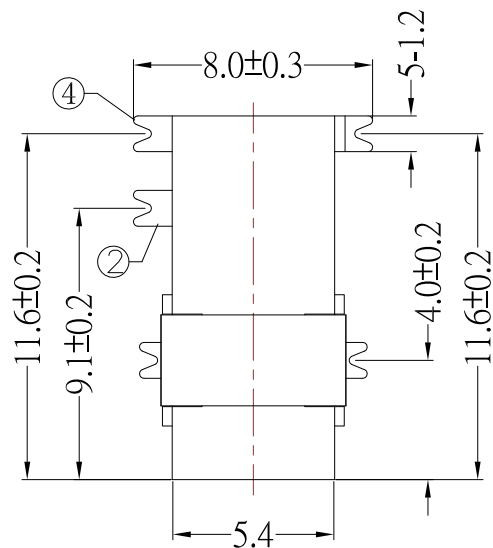

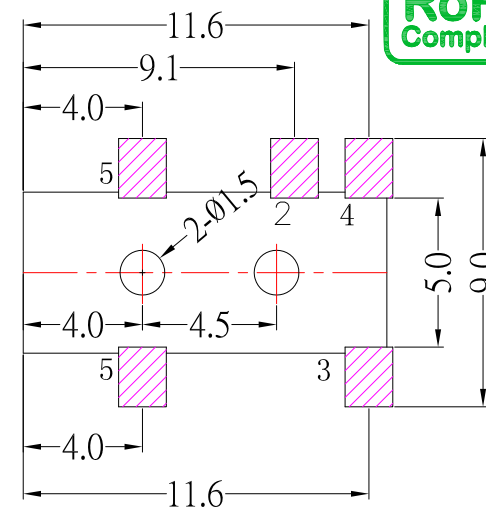



MODEL NO.	DC-059DS-1.65
SCHEMATIC	
CENTER PIN	Ø 1.65mm

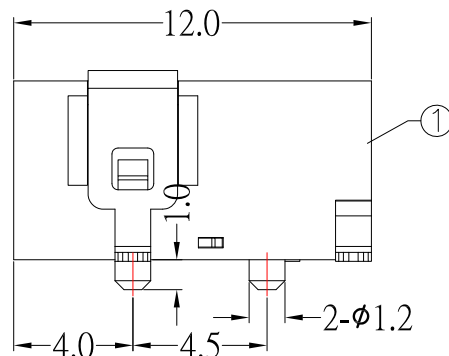


P.C.B LAYOUT
TOP VIEW

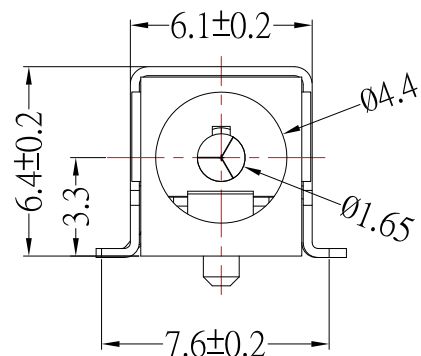

SPECIFICATION

- 1.Rating : DC 30V, 3.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 4~20N;
- 6.life test : 5,000 cycles °

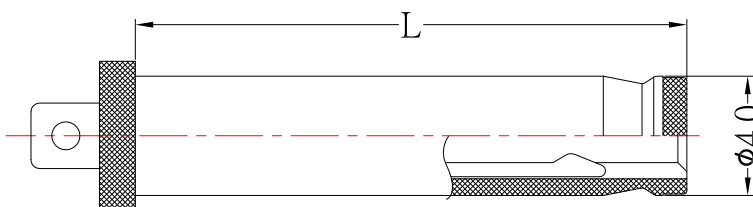

RECOMMENDED PLUG

⑤	CONTACT FOOT	1	BRASS	Ag-Plating
④	PIN	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/19/18			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	09/19/18			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-059DS-1.65-S124
Tony Kao	09/19/18	1 : 1		
		SHEET NO.	PART NO.	DC-059DS-1.65-S124
		1 of 1		
				SIZE A4
				VER R4