

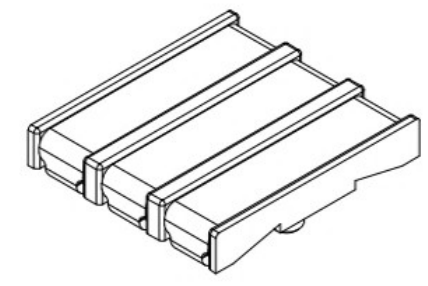
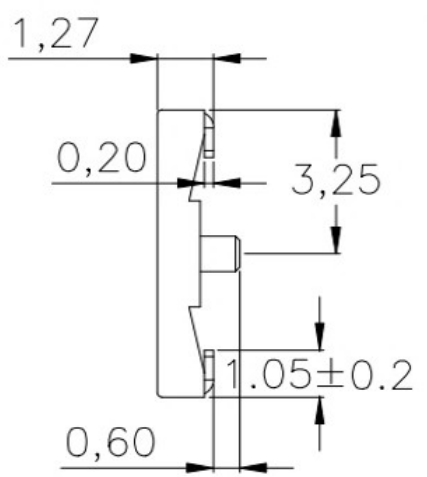
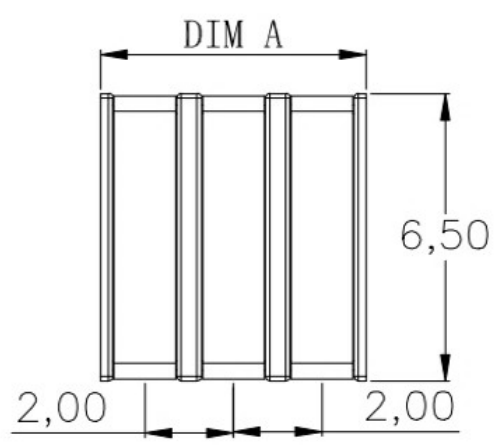



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

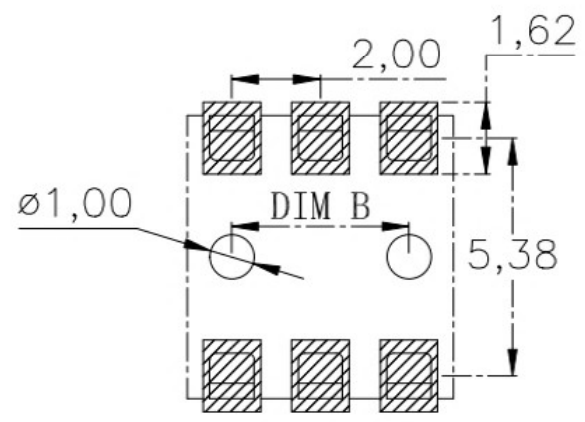

DIM A	DIM B
4.0	2.0
6.0	4.0
8.00	6.0
10.0	8.0
12.0	10.0
14.0	12.0
16.0	14.0

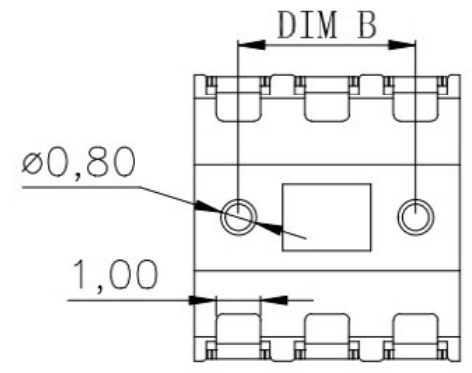

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

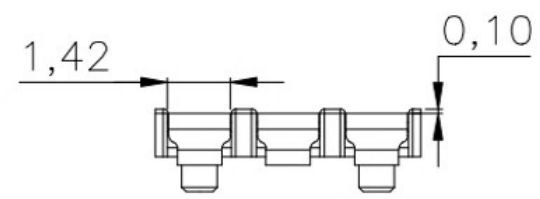

性能:
 额定电流: 2.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP
 接触点(材质): 磷铜, 镀金

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES
 DECIMALS: DIM TOL X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.10
 ANGLES: DIM TOL X. ±2° X.X ±1° X.XX ±1° X.XXX ±1°

东莞市高迪电子有限公司
 DWG NO. PART NAME: DESIGN: PART NO. CHECK: APPROVED: REV. A UNIT: mm SHEET: 1/1