

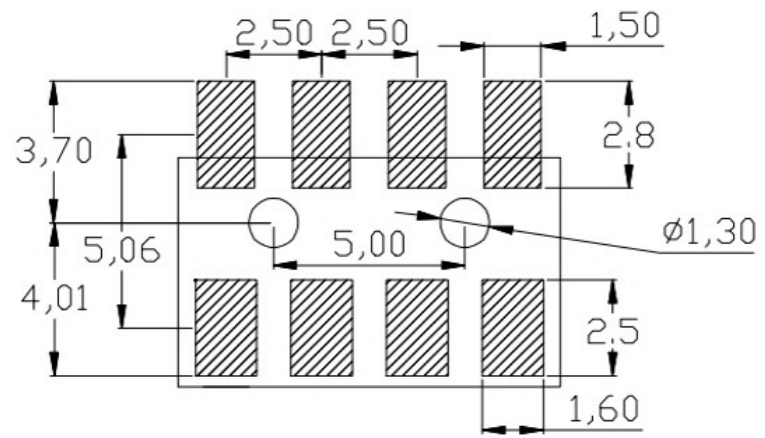
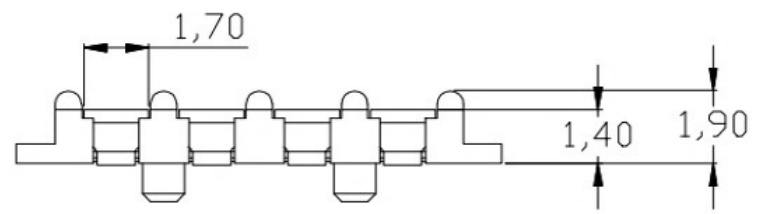
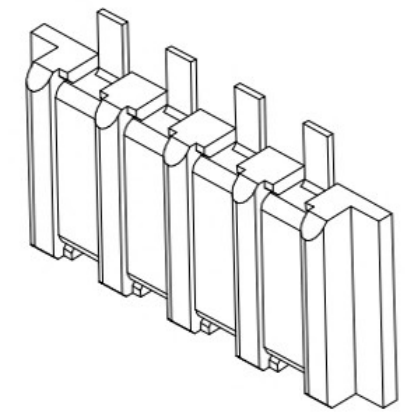
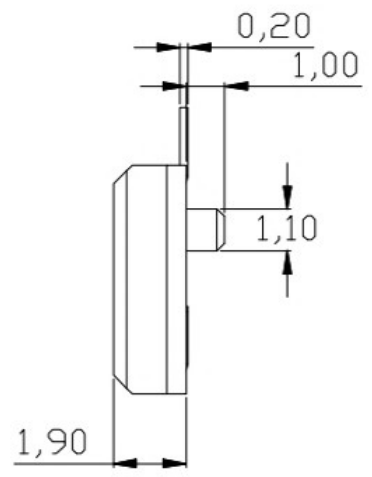


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

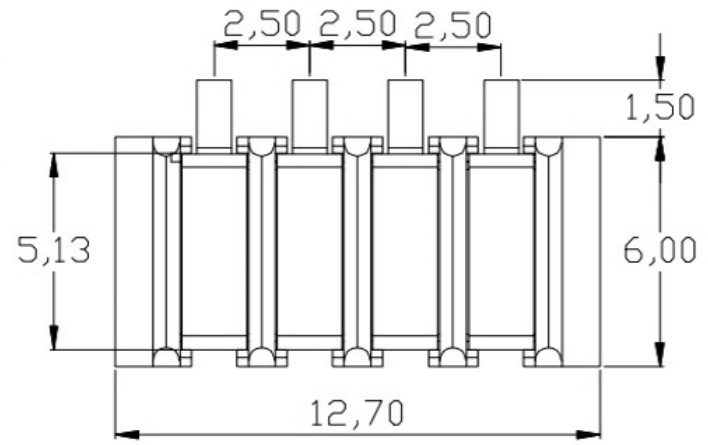

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX $\pm$ 0.05)

性能:
 额定电流: 2.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30m Ω
 绝缘电阻: 500M Ω
 工作温度: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C
 塑件 (材质): LCP
 接触点 (材质): 磷铜, 镀金

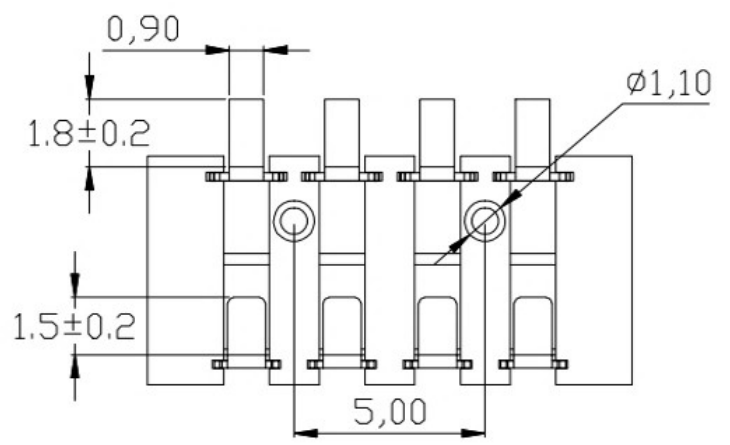

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.	PART NAME:		
DIM	TOL	DIM	TOL	DESIGN:	PART NO.		
X.	± 0.50	X.	$\pm 2^{\circ}$	CHECK:	REV. UNIT: SHEET:		
X.X	± 0.30	X.X	$\pm 1^{\circ}$	APPROVED	A	mm	1/1
X.XX	± 0.20	X.XX					
X.XXX	± 0.10	X.XXX					

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK