

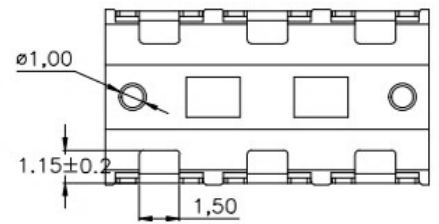
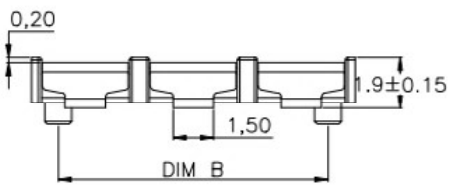
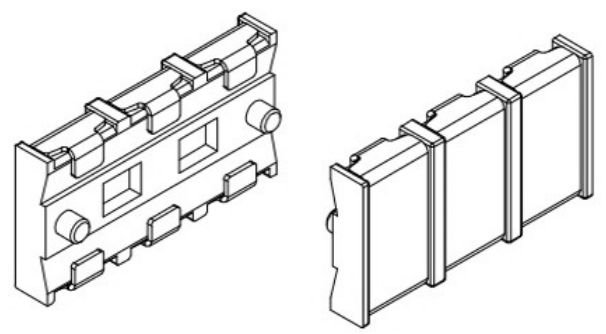



| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |

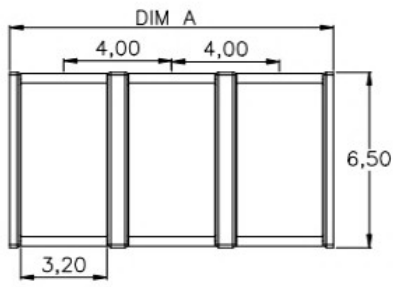

| DIM A | DIM B |
|-------|-------|
| 8.0   | 6.0   |
| 12.0  | 10.0  |
| 16.0  | 14.0  |
| 20.0  | 18.0  |
| 24.0  | 22.0  |

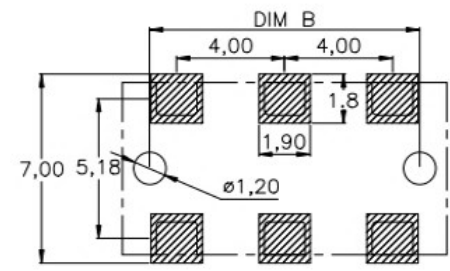

RECOMMENDED PCB LAYOUT  
TOP VIEW (. XX ± 0.05)

性能:  
 额定电流: 2.0A  
 额定电压: 12V  
 耐电压: 500V  
 接触电阻: 30mΩ  
 绝缘电阻: 500MΩ  
 工作温度: -40℃~+85℃  
 塑件(材质): LCP  
 接触点(材质): 磷铜, 镀金

| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |
|------|-----------|------|-----------------------|-------------|--------|
| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |

|                                       |       |         |     |             |            |          |            |
|---------------------------------------|-------|---------|-----|-------------|------------|----------|------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES |       |         |     | 东莞市高迪电子有限公司 |            |          |            |
| DECIMALS:                             |       | ANGLES: |     | DWG NO.     | PART NAME: |          |            |
|                                       |       |         |     | DESIGN:     | PART NO.   |          |            |
|                                       |       |         |     | CHECK:      |            |          |            |
|                                       |       |         |     | APPROVED    |            |          |            |
| DIM                                   | TOL   | DIM     | TOL | REV. A      |            | UNIT: mm | SHEET: 1/1 |
| X.                                    | ±0.50 | X.      | ±2° |             |            |          |            |
| X.X                                   | ±0.30 | X.X     | ±1° |             |            |          |            |
| X.XX                                  | ±0.20 | X.XX    | --- |             |            |          |            |
| X.XXX                                 | ±0.10 | X.XXX   | --- |             |            |          |            |