

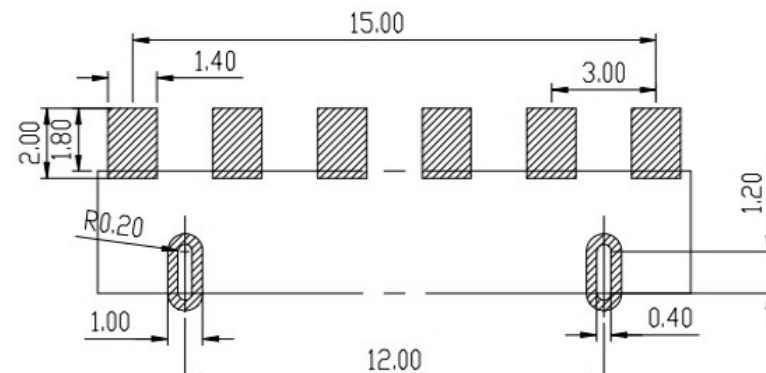
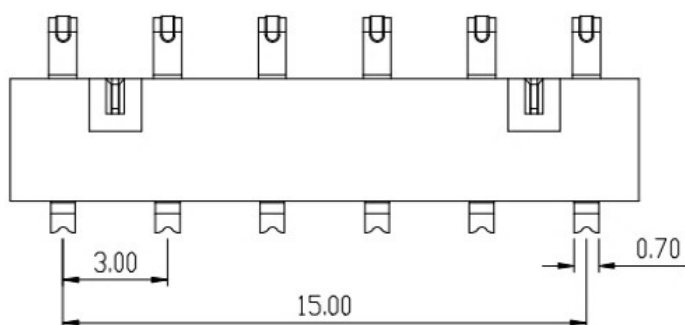
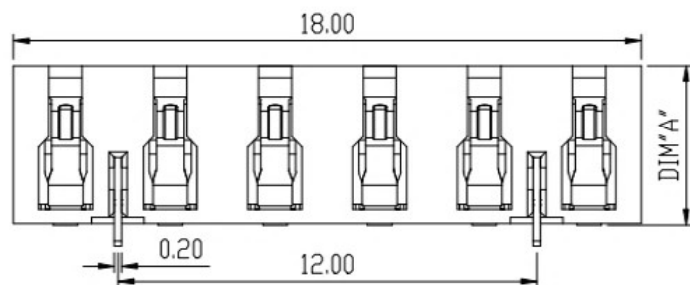


6		7	8	9	
REV.	ECN NO.	DESCRIPTION		DESIGN	DATE
A		INITIAL		Koi	2018.03.29

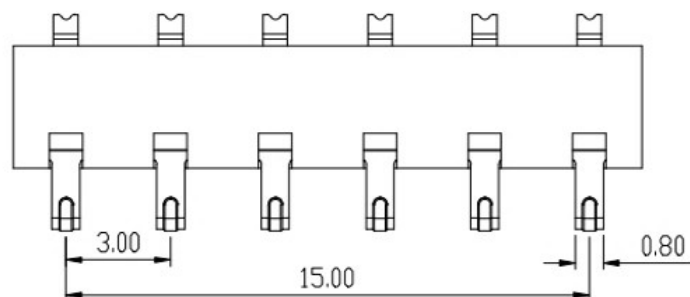

RECOMMENDED PCB LAYOUT
TOL:(± 0.05)

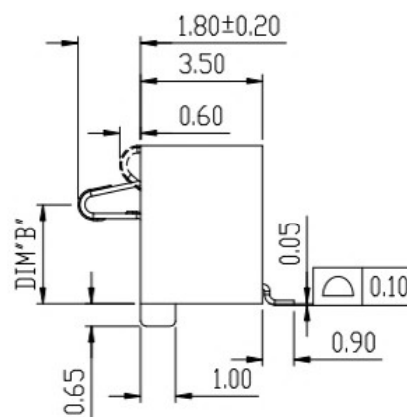

DIM A	DIM B
4.6	2.9
5.0	3.3
6.5	4.8
7.2	5.5

性能：
 额定电流：3.0A
 额定电压：24V
 耐电压：500V
 接触电阻：30mΩ MAX
 绝缘电阻：500MΩ
 工作温度：-40℃～+85℃
 塑件（材质）：LCP，耐高温260℃
 接触点（材质）：铜合金，触点镀金3U'

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
				DESIGN:		PART NO.	
DIM	TOL	DIM	TOL	CHECK:			
X.	±0.50	X.	±2°	APPROVED		REV.	UNIT:
X.X	±0.30	X.X	±1°		A	mm	SHEET:
X.XX	±0.20	X.XX	----		1/1		
X.XXX	±0.10	X.XXX	----				

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T		Au PLATED
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK