

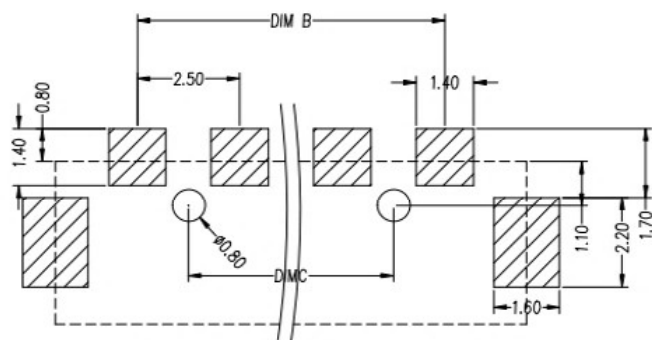
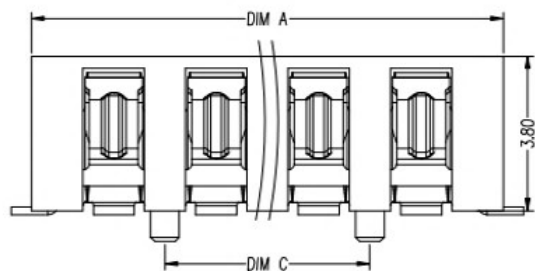
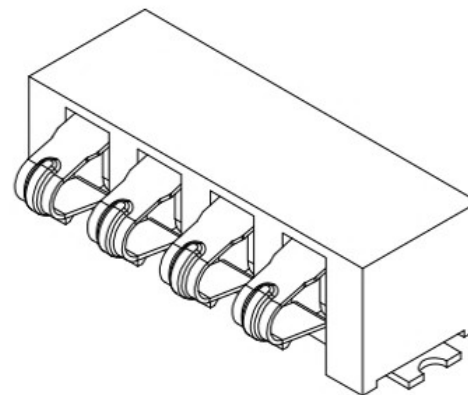
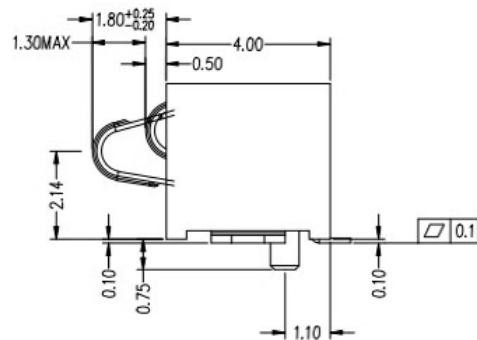


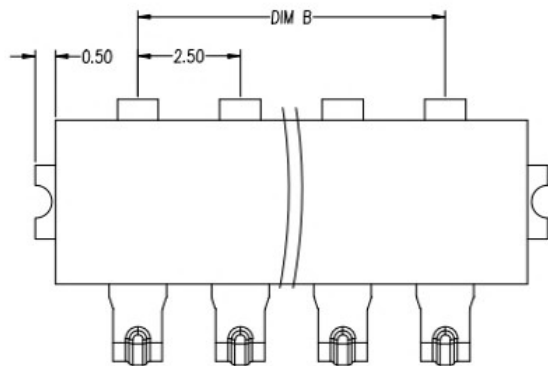

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

DIM A	DIM B	DIM C
9.0	5.0	2.5
11.5	7.5	5.0
14.0	10.0	7.5
16.5	12.5	10.0

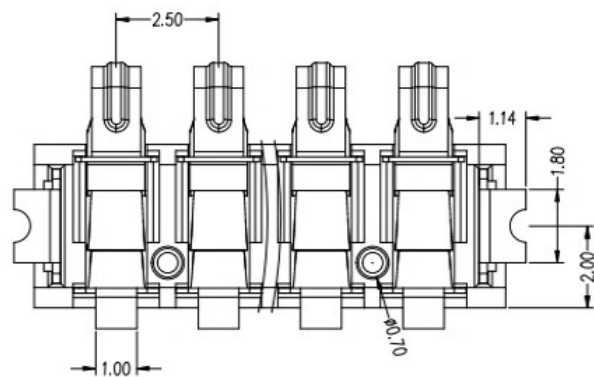

性能:
 额定电流: 3.0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30mΩ MAX
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP, 耐高温260℃
 接触点(材质): 铜合金, 触点镀金3U'

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市高迪电子有限公司

DECIMALS:

ANGLES:

DWG NO.

PART NAME:

DESIGN:

PART NO.

CHECK:

APPROVED

REV. UNIT: SHEET:

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK