
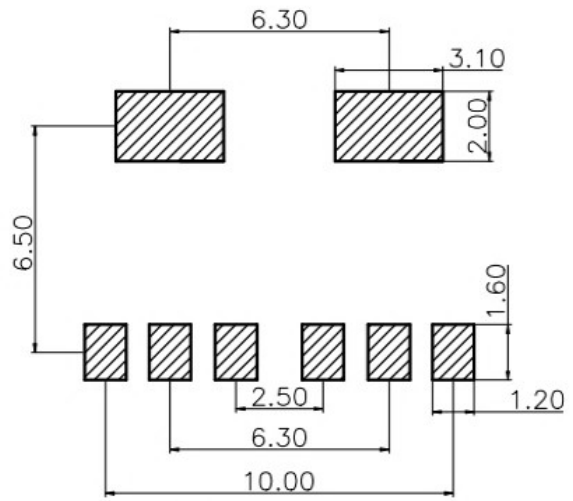
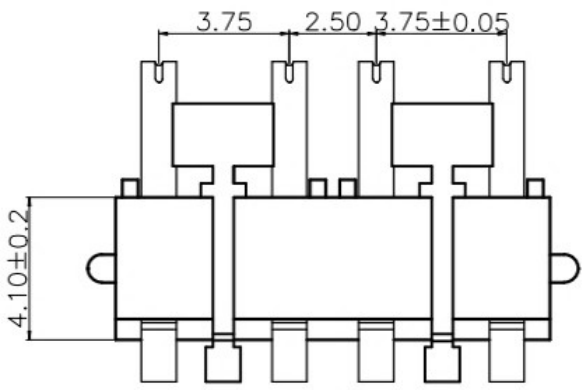
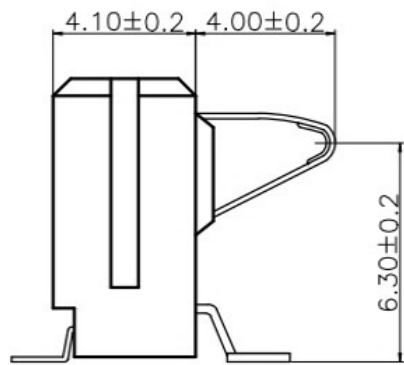


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

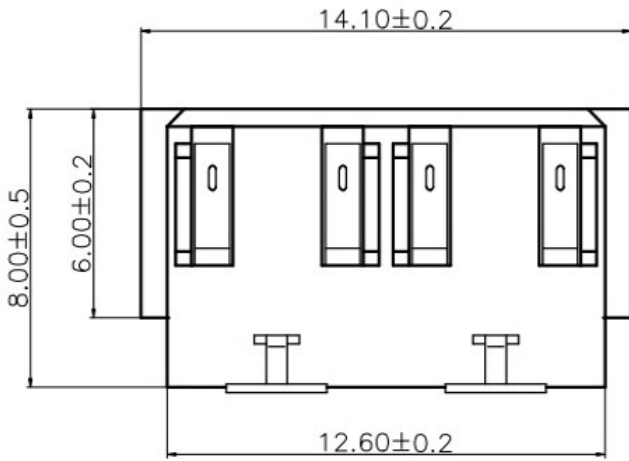

PCB Layout

性能:
 额定电流: 3.0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30mΩ MAX
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP, 耐高温260℃
 接触点(材质): 铜合金, 触点镀金3U'

						UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市高迪电子有限公司					
						DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
						DIM		TOL		DESIGN:		PART NO.	
②						HOUSING		1		LCP		BLACK	
①						CONTACT A		2		PHOSPHOR BRONZE 0.20T		Au PLATED	
ITEM						PART NAME		Q'TY		MATERTAL		DESCRIPTION	
						X.		±0.50		X.		±2°	
						X.X		±0.30		X.X		±1°	
						X.XX		±0.20		X.XX		---	
						X.XXX		±0.10		X.XXX		---	
						0		1		2		3	
						4		5		6		7	
						8		9		10		11	
						A		mm		1/1			