

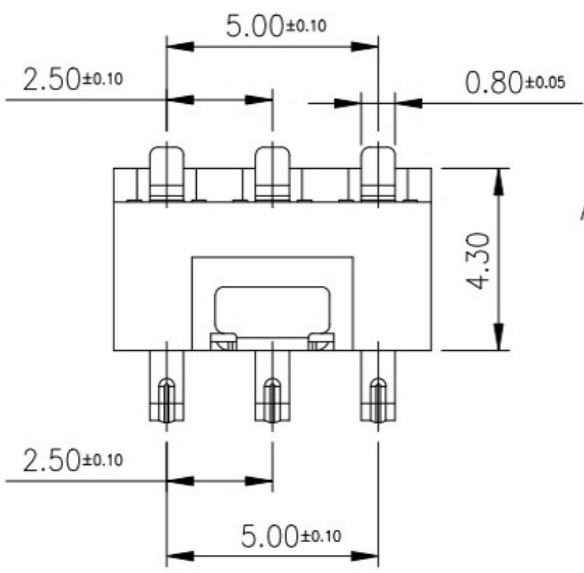



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

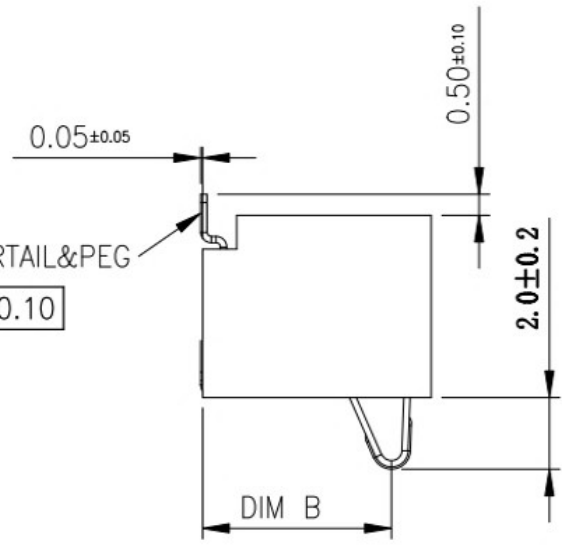


ALL SOLDER TAIL & PEG



DIM A	DIM B
5.4	4.2
6.0	4.7
7.0	5.6
8.0	6.7

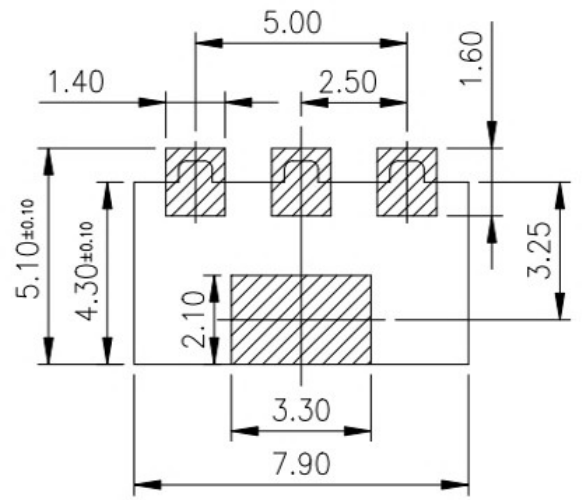

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX ± 0.05)

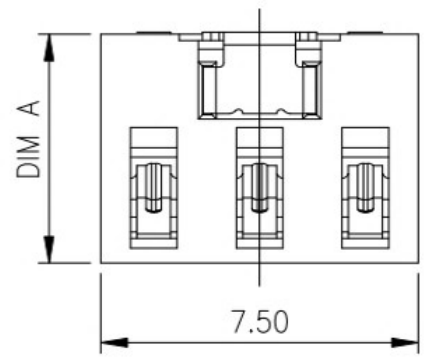

性能:
 额定电流: 3.0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30mΩ MAX
 绝缘电阻: 500MΩ
 工作温度: -40℃ ~ +85℃
 塑件 (材质): LCP, 耐高温 260℃
 接触点 (材质): 铜合金, 触点镀金 3U'

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.	PART NAME:		
DIM	TOL	DIM	TOL	DESIGN:	PART NO.		
X.	±0.50	X.	±2°	CHECK:			
X.X	±0.30	X.X	±1°	APPROVED			
X.XX	±0.20	X.XX					
X.XXX	±0.10	X.XXX					
				REV. A	UNIT: mm	SHEET: 1/1	