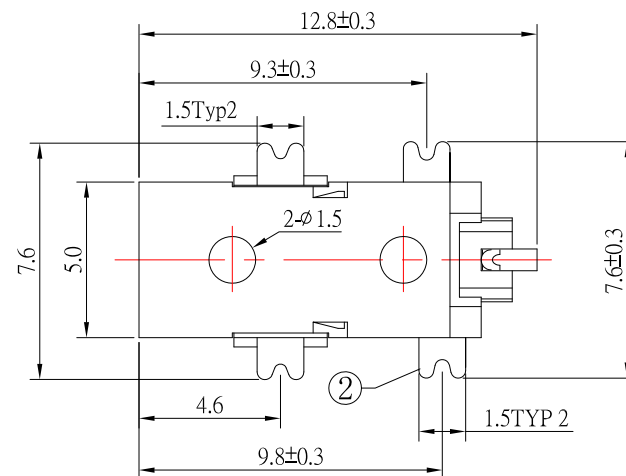
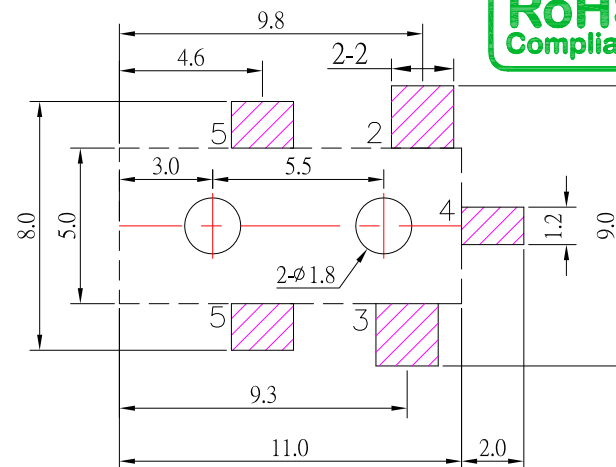
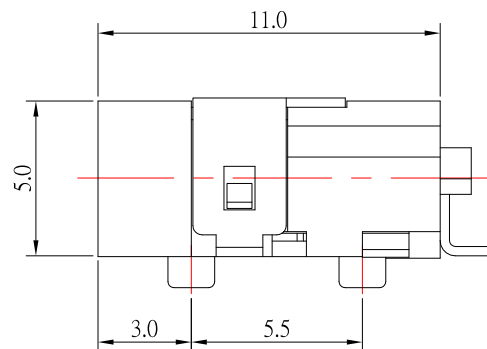
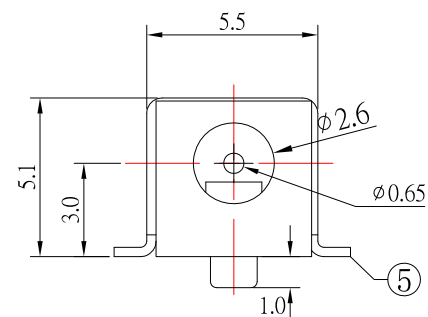


1. Rating : DC 30V, 1.0A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-15N;
6. life test : 5,000 cycles °

⑤	CONTACT FOOT	1	BRASS	Ag-Plating
④	PIN	1	BRASS	Ag-Plating
③	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
②	FLAT PIECE	1	BRASS	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK		
Jack Lu	02/27/20	FINISH		MODLE	DC JACK		
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-032-0.65-S124		SIZE
Jacky Chen	02/27/20	SHEET NO.	1 of 1	PART NO.	DC-032-0.65-S124		A4
APPROVED BY:	DATE						VER
Tony Kao	02/27/20						R2

2	更新尺寸	Jack	022720
1	新增 pcb layout尺寸	Jack	111519
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.